

2532 FOX HOLLOW RD

19702178

1/8/2008

duponbj

Groundwater and Wastewater Services File Imaging Project
May 2007
Barcode Font = IDAutomationHC39M

FEE: _____
DATE: _____

AUTHORIZATION FOR WASTEWATER SYSTEM CONSTRUCTION ACS

PERMIT NUMBER: 5671B
PARCEL NUMBER: 197-021-39 PO

JOB LOCATION ADDRESS: Lot #15 Fox Hollow Drive
PROPERTY OWNER: Russell J. Davis
BUILDING CONTRACTOR: Unknown
SUBDIVISION NAME: Davis Run
AUTHORIZATION ISSUED BY: Trevor Thomason, R.S.I. DATE: 08/30/04

DENR/DEH AUTHORIZED AGENT

AUTHORIZATION CONDITIONS

1. WASTEWATER SYSTEM CONSTRUCTION AND INSTALLATION MUST MEET ALL CONDITIONS AND SPECIFICATIONS AS SET FORTH IN IMPROVEMENT PERMIT NUMBER 5671B, AND THE ATTACHED SITE PLAN WITH SYSTEM DETAILS. CONSTRUCTION AND INSTALLATION MUST ALSO MEET ALL REQUIREMENTS SET FORTH IN THE RULES GOVERNING SANITARY SEWAGE COLLECTION, TREATMENT, AND DISPOSAL AND ANY OTHER APPLICABLE RULES AND LAWS.

2. AN *INSTALLATION, CONSTRUCTION, ALTERATION AND/OR REPAIR APPROVAL* MUST BE SECURED PRIOR TO INSTALLATION OF THE SEPTIC TANK SYSTEM. THE INSTALLER OF THE SYSTEM SHALL BE A REGISTERED SEPTIC TANK CONTRACTOR WITH THE MECKLENBURG COUNTY HEALTH DEPARTMENT.

3. ANY ALTERATION IN SITE OR SOIL CONDITIONS (INCLUDING LOCATION OF STRUCTURES AND APPURTENANCES) OR MODIFICATION IN USE, DESIGN WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS AS SPECIFIED IN THE ASSOCIATED IMPROVEMENT PERMIT AND APPLICATION, MAY SUBJECT THIS CONSTRUCTION AUTHORIZATION AND ASSOCIATED PERMIT(S) TO REVOCATION.

4. THIS CONSTRUCTION AUTHORIZATION AS PROVIDED IN G.S. 130A-335(f) AND G.S. 130A-336(b) SHALL BE VALID FOR A PERIOD EQUAL TO THE VALIDITY OF THE IMPROVEMENT PERMIT, NOT TO EXCEED 60 MONTHS.

5. OTHER CONDITIONS:

CONDITIONS OF IMPROVEMENT PERMIT / CONSTRUCTION AUTHORIZATON

Permit Number: **5671B**

Tax Number: **197-021-39 PO**

- The IMPROVEMENT PERMIT is subject to revocation if site plans or the intended use change. There is to be **NO** grading, filling, or disturbance of the soil in the area of the septic tank system or repair area.
- CONSTRUCTION AUTHORIZATION must be obtained prior to receiving a Building Permit. The Construction Authorization is **NOT** transferable. Do not clear, grade, fill or disturb soil prior to obtaining a Construction Authorization.
- Domestic-type wastewater only. No industrial process wastewater may be discharged into the system.

Basement: ☐ Yes ☒ No ☐ Partial Basement

Primary Wastewater System

Type: ☐ I ☐ II ☒ III ☐ IV ☐ V ☐ VI

☐ Conventional
☐ Prefabricated, permeable block panel system
☐ Shallow Placed Conventional
☐ Low Pressure Pipe
☐ Large Diameter Pipe
☐ Fill
☐ Other
☒ Innovative or Experimental:

0.275 Long-term acceptance rate (GPD/ft^2)	480 Max gallons/day wastewater flow	1350 Absorption Area (ft^2)	9 Trench spacing (min. on centers) (ft)
Serviced by private well: ☐ Yes ☒ No	1500 Gallon septic tank	450 Total trench length (ft)	36 Maximum trench depth (in) (At least 12" of provisionally suitable soil must remain between trench bottom and unsuitable soil conditions.)
4 Bedrooms in residence	NA Gallon pump tank	NA Depth of stone (in)	

Any surface water present: **No** Type: Minimum separation distance (ft):

Additional conditions: **House plumbing must be brought out at left front side of house. Install drain lines level and on contour. Repair septic system will require lift station to deliver effluent to rear yard.**

Repair Area System

Type: ☐ I ☐ II ☒ III ☐ IV ☐ V ☐ VI

☐ Conventional
☐ Prefabricated, permeable block panel system
☐ Shallow Placed Conventional
☐ Low Pressure Pipe
☐ Large Diameter Pipe
☐ Fill
☐ Other
☒ Innovative or Experimental:

1200 Absorption Area (ft^2) 400 Total trench length (ft)	NA Depth of stone (in)	9 Trench spacing (min. on centers) (ft)	36 Maximum trench depth (in)

The undersigned, an authorized agent of the MECKLENBURG COUNTY HEALTH DEPARTMENT, certifies that the Department has approved the Request for the Job Location contained in this document. The approval is granted in accordance with the provisions of Laws and Rules For Sewage Treatment, and Disposal Systems in effect at the time of issuance of the permit and is subject to the following provisions:

*** No work shall be conducted on the septic tank system until an Installation, Construction, Alteration and/or Repair Approval is granted by this Department.

*** This Improvement permit is transferable.

RSE 8/30/04

DENR Authorized Agent Date

Owner/Agent Signature Date

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 N. TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE: (704) 336-5103
FAX: (704) 336-6894

NC DENR
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102


FILE: 5671B

TC: 197-021-39 P.O.

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

LOT #15 DAVIS RUN

SCALE: 1"=40'

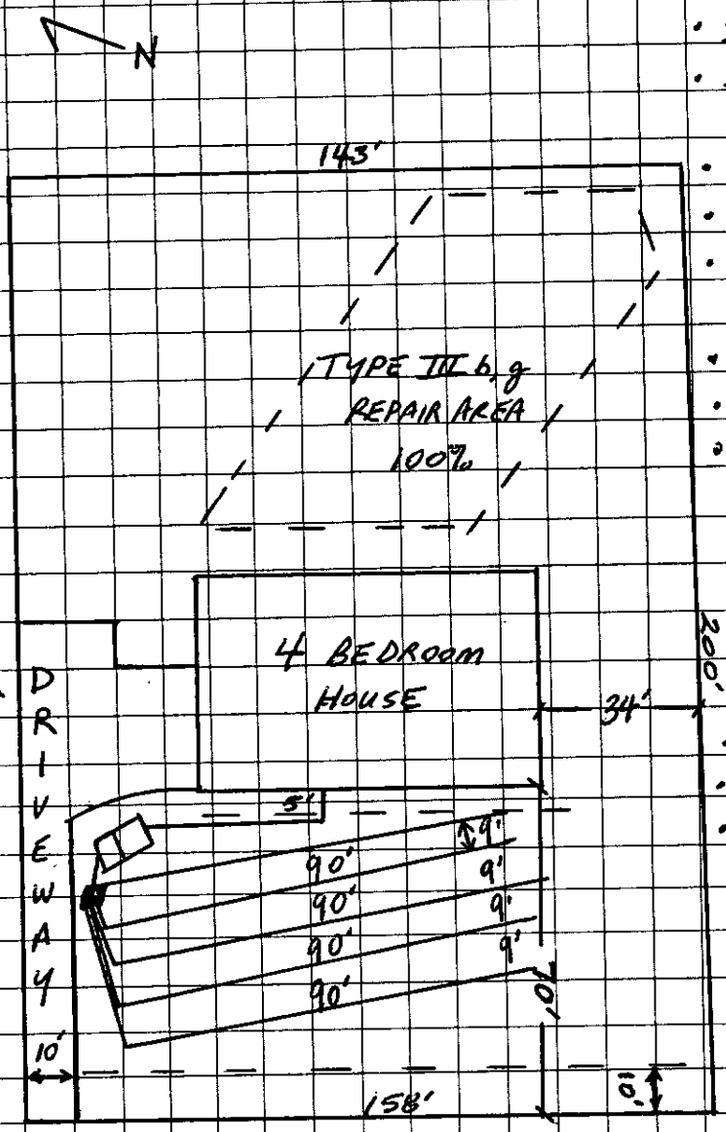

COMMENTS

- SYSTEM DESIGN FLOW = 480GPD
- SITE LTAR: FRONT 0.275 GPD/FT²
  REAR 0.30 GPD/FT²
- TYPE III g SEPTIC SYSTEM
- INSTALL 5 LINES AT 90' x 3'
- INSTALL DRAIN LINES ON 9' CENTERS, LEVEL, AND ON CONTOUR
- 1500 GALLON SEPTIC TANK
- DISTRIBUTION BOX
- TYPE III b,g SEPTIC SYSTEM FOR REPAIR AREA (WILL REQUIRE EFFLUENT PUMP AND ADDITIONAL PUMP TANK).

SETBACKS

- 10' FROM ALL PROPERTY LINES
- 5' FROM HOUSE FOUNDATION
- 100' (50' MINIMUM) FROM ALL PRIVATE WELLS.

APPROVAL DATE [signature], RSI 8/30/04

OWNER/AGENT SIGNATURE

DATE

White - Health Department's Copy Canary - E.H.S. Copy Pink - Owner's Copy

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102


FILE: 5671B

TC: 197-021-39 P.O.

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

LOT #15 DAVIS RUN

SCALE: 1"=40'

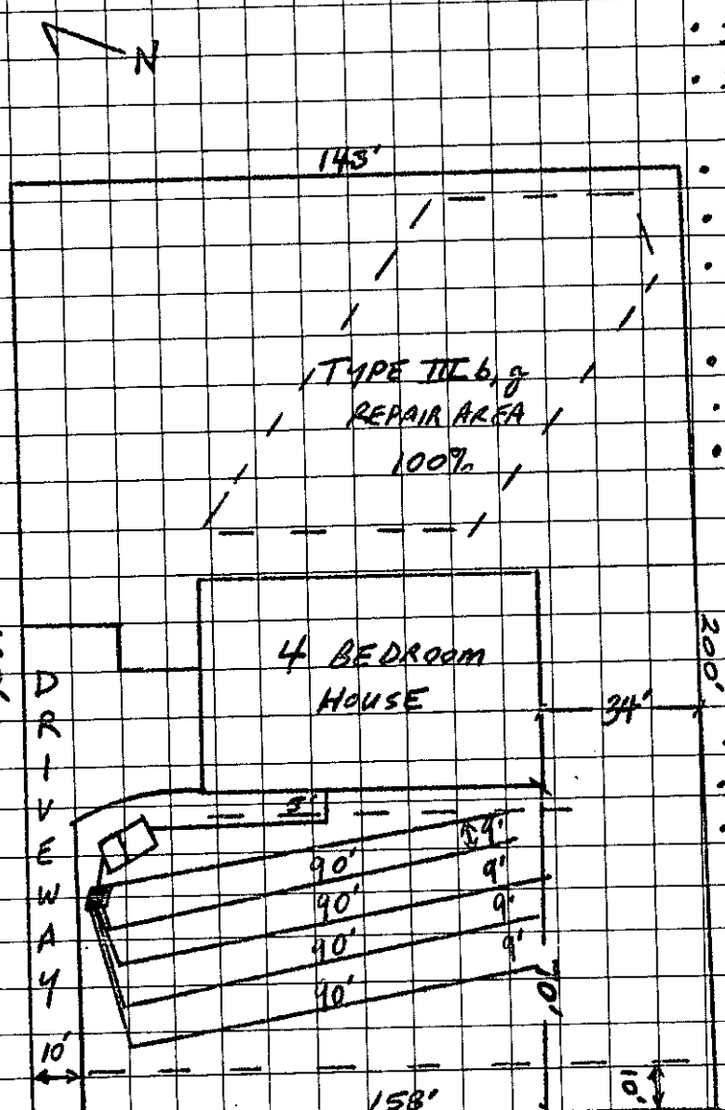

COMMENTS

- SYSTEM DESIGN FLOW = 480GPD
- SITE LTAR: FRONT 0.275 GPD/FT²
  REAR 0.30 GPD/FT²
- TYPE III g SEPTIC SYSTEM
- INSTALL 5 LINES AT 90' x 3'
- INSTALL DRAIN LINES ON 9' CENTERS, LEVEL, AND ON CONTOUR
- 1500 GALLON SEPTIC TANK
- DISTRIBUTION BOX
- TYPE III b, g SEPTIC SYSTEM FOR REPAIR AREA (WILL REQUIRE EFFLUENT PUMP AND ADDITIONAL PUMP TANK).

SETBACKS

- 10' FROM ALL PROPERTY LINES
- 5' FROM HOUSE FOUNDATION
- 100' (50' MINIMUM) FROM ALL PRIVATE WELLS.

APPROVAL DATE [signature], RSS 8/30/04

OWNER/AGENT SIGNATURE

DATE

White - Health Department's Copy Canary - E.H.S. Copy Pink - Owner's Copy

Department of Environment, Health, and Natural Resources
Division of Environmental Health
On-site Wastewater Section

Sheet: 1 of 2
Property ID: PO 197-021-39
Lot #: 15
File #: 5671B
Code: 1

ACS

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM

Owner: Russell J. Davis, Jr.
Address: 12655 Lawyers Road, Charlotte, N. C. 28227
Proposed Facility: Residence
Design Flow (.1949): 480gpd
Location of Site: Fox Hollow Road
Water Supply: [x] Public [ ] Individual [ ] Well [ ] Spring [ ] Other
Evaluation Method: [x] Auger Boring [ ] Pit [ ] Cut
Type of Wastewater: [x] Sewage [ ] Industrial Process [ ] Mixed

Applicant: Beverly Hathcock
Date Evaluated: 8/9/2004
Property Size: .69a
Property Recorded:

PROFILE #	.1940 Landscape Position/ Slope%	Horizon Depth (IN.)	SOIL MORPHOLOGY .1941 .1941 Structure/ Texture	.1941 Consistence Mineralogy	OTHER PROFILE FACTORS .1942 Soil Wetness/ Color	.1943 Soil Depth (IN.)	.1956 Sapro Class	b .1944 Restr Horiz	Profile Class & LTAR
1	LS, 8	0-5	GR/SCL	FR/SEXP/SS/SP	>48" TO SOIL WETNESS	48	N/A	NONE	PS, IV .275GPD/FT^2
		5-48	SBK/ABK/C	FI/SEXP/S/P					
2	"	0-6	GR/SCL	FR/SEXP/SS/SP	"	"	"	"	"
		6-37	SBK/ABK/C	FI/SEXP/S/P					
		37-48	SBK/C	"					
3	"	0-7	GR/SCL	FR/SEXP/SS/SP	>50" TO SOIL WETNESS	50	"	"	"
		7-38	SBK/ABK/C	FI/SEXP/S/P					
		38-50	SBK/C	"					
4	LS,6	0-3	GR/CL	FR/SEXP/SS/SP	>51" TO SOIL WETNESS	51	"	"	PS, IV .3GPD/FT^2
		3-40	SBK/C	FI/SEXP/S/P					
		40-51	SBK/CL	FR/SEXP/SS/SP					
5	"	0-4	GR/CL	"	>50" TO SOIL WETNESS	50	"	"	"
		4-37	SBK/C	FI/SEXP/S/P					
		37-50	SBK/CL	FR/SEXP/SS/SP					

Description	Initial System	Repair System
Available Space (.1945)	PS	PS
System Type(s)		
Site LTAR	.275GPD/FT^2	.3GPD/FT^2

Other Factors (.1946):
Site Classification (.1948): PROVISIONALLY SUITABLE
Evaluated By: W. R. Marlin, LSS, 8/9/2004, W. R. Marlin
Others Present:

COMMENTS:
100% repair

Landscape Position	Group	Texture	.1955 LTAR
R-Ridge	I	S-Sand	1.2 - 0.8
SS-Shoulder Slope		LS-Loamy Sand	
LS-Linear Slope			
FS-Food Slope	II	SL-Sandy Loam	0.8 - 0.6
NS-Nose Slope		L-Loam	
HS-Head Slope			
CC-Concave Slope	III	SI-Silt	0.6 - 0.3
CV-Convex Slope		SICL-Silty Clay Loam	
T-Terrace		CL-Clay Loam	
FP-Flood Plain		SCL-Sandy Clay Loam	
	IV	SC-Sandy Clay	0.4 - 0.1
		SIC-Silty Clay	
		C-Clay	


Structure
SG-Single Grain
M-Massive
CR-Crumb
GR-Granular
SBK-Subangular Blocky
ABK-Angular Blocky
PL-Platy
PR-Prismatic

Consistence
Moist
VFR-Very Friable
FR-Friable
FI-Firm
VFI-Very Firm
EFI-Extremely Firm

Consistence
Wet
NS-Non-Sticky
SS-Slightly Sticky
S-Sticky
VS-Very Sticky
NP-Non-Plastic
SP-Slightly Plastic
P-Plastic
VP-Very Plastic

Mineralogy
SEXP-Slightly Expansive
EXP-Expansive

Sketch of Soil Evaluation Locations

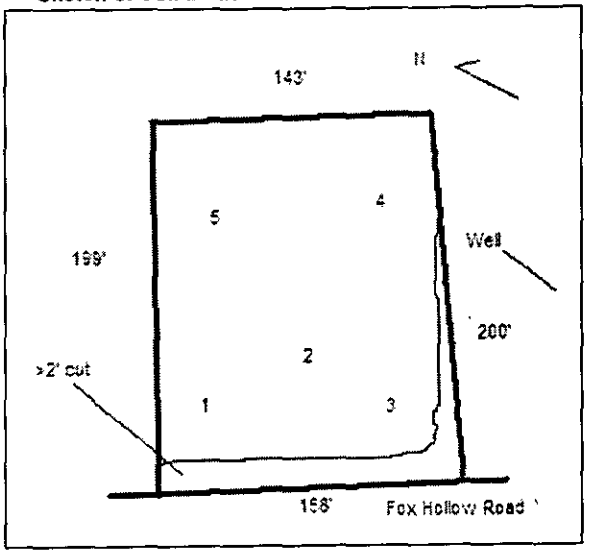

FEE: 200.00
DATE: 7/29/04 JKA

APPLICATION FOR IMPROVEMENT PERMIT FOR RESIDENTIAL SITE INDIVIDUAL WATER AND WASTEWATER SYSTEMS PROGRAM

[ ] CRT

TYPE APPLICATION: ___ NEW SYSTEM ___ EXPANSION/ ALTERATION OF EXISTING SYSTEM ___ REPAIR OF EXISTING SYSTEM

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENT, HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

FILE #: 5Ce71B

PROPERTY INFORMATION (FROM ENGINEERING FORM) FOR JOB LOCATION:

TAX/PARCEL NUMBER: 197-021-39

STREET ADDRESS: Fox Rabbit Ln 15

SUBDIVISION OR MOBILE HOME PARK NAME: Davis Run

LOT NUMBER: 15

TYPE OF BUILDING (CHECK ONE):

___ SINGLE MOBILE HOME(S)
___ DOUBLE WIDE (D)
✓ HOUSE (H)
___ MODULAR HOME (M)
___ MULTIPLE FAMILY (U)
___ OTHER (O)

HEATED SQUARE FOOTAGE: 2500-3500

NUMBER OF BEDROOMS: 4

NUMBER OF OCCUPANTS:

FOUNDATION FOR RESIDENCE:

___ WITHOUT BASEMENT
___ ON SLAB
✓ CRAWL SPACE
___ WITH BASEMENT /PLUMBING
___ WITH BASEMENT /NO PLUMBING

TOWNSHIP (CHECK ONE):

___ 0 MECKLENBURG
___ 1 CHARLOTTE
___ 2 DAVIDSON
___ 3 CORNELIUS
___ 4 PINEVILLE
___ 5 MATTHEWS
___ 6 HUNTERSVILLE
✓ 7 MINT HILL

CLOSING DATE _____

IF EXPANSION/ALTERATION OF EXISTING SYSTEM, DESCRIBE THE PROPOSED BUILDING ADDITION:

WILL THERE BE A HOME BUSINESS IN THE RESIDENCE: ___ YES ✓ NO TYPE: _____

WATER SUPPLY (CHECK ONE):

___ COMMUNITY (C)
✓ MUNICIPAL (M)
___ PRIVATE WELL (P)
___ SHARED WELL (S)
___ OTHER 'SPRINGS' (O)

IF ANY OF THE FOLLOWING ARE LOCATED ON THE PROPERTY, PLEASE SHOW LOCATION ON PLAT:

BURIED CABLES, LANDFILLS, STUMPHOLES	___ YES ___ NO	WELL, SPRINGS OR WATERLINES	___ YES ___ NO
EXISTING WASTEWATER SYSTEMS	___ YES ___ NO	DESIGNATED WETLANDS	___ YES ___ NO
EASTMENTS OR RIGHT-OF-WAYS	___ YES ___ NO		

PROPERTY OWNER:

NAME: Davis (LAST) Russell (FIRST) J (MI)

ADDRESS: 12655 Lawyers Rd

CITY: Mint Hill STATE: NC ZIP: 28227

DAYTIME PHONE: 704 545-8867

LEGAL AGENT FOR PROPERTY OWNER, IF APPLICABLE:

NAME: (LAST) (FIRST) (MI)

DAYTIME PHONE: ( ) -

WHAT DATE WAS THE PROPERTY ORIGINALLY DEEDED AND RECORDED? _____

An Improvement Permit is subject to suspension or revocation if site plans or the intended use change or if information submitted in this application is falsified or changed. The undersigned, owner, or legal agent for the owner, of the property described above as the "Job Location" has read the foregoing application, acknowledges that the contents of same are true, and authorizes agents of the Mecklenburg County Health Department to enter onto the property for the purpose of processing this request.

SIGNED: Beverly A Hockett DATE: 7-28-04

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR., SUITE 211, 700 N. TRYON ST., CHARLOTTE, N.C. 28202., (704) 336-5102

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 5671B

TC: 197-021-39P0

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

LOT # 15 - DAVIS RUN
X = plumbing exit

142.84

199.27

75

45

X

70

200.45

157.60

60'

FOX HOLLOW ROAD

OWNER/AGENT SIGNATURE

DATE 08-16-04

APPROVAL DATE

White - Health Department's Copy

Canary - E.H.S. Copy

Pink - Owner's Co