

15611 DEERHAVEN CT

00308153

12/31/2007

duponbj

Groundwater and Wastewater Services File Imaging Project
May 2007
Barcode Font = IDAutomationHC39M

CERTIFICATE OF COMPLETION/OPERATION PERMIT

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 7425-3 DATE: 2-9-99

TC: 003-091-53 ☐ L ☒ CRT

SERIAL Nº 17931

Name of Owner Becky Childers Juris.:

Address of Property 15611 Deerhaven Ct.

Inspection Data:

Tank Material PVC

Total Length of Drainfield 535

Number of Lines 5 @

Cover Depth 6-12"

Water Supply Source well

Distance to Water Source 400'+

Excavation Inspected 2-8-99

Tank(s) Inspected 2-8-99

Wash Line Inspected —

High Water Alarm Inspected —

PLOT

Design 1999 1500 ST CAN. 1200SFT 12" CCCIC CTR# 80

The undersigned has inspected the Septic Tank System described above, and certifies it has been

☒ installed or constructed ☐ altered or repaired

☒ in accordance with the permit issued ☐ as detailed in the plot above

and meets the provisions of I5A NCAC 18A. 1900, "Laws And Rules For Sewage Treatment and Disposal Systems" in effect on the date of issuance of the permit. This issuance of this

☐ Certificate of Completion ☒ Operation Permit

does not in any way guarantee that the system will operate properly or relieve any person now or hereafter owning, controlling, or using such system from any liability resulting from the failure of the system to operate properly. This document is issued subject to those restrictions and conditions shown on the permit(s) and the provisions of I5A NCAC 18A. 1990 in addition to those listed below under "COMMENTS." This document shall be null and void if any information contained in the application is untrue or if any additions are made to the property which would increase the requirements for said system.

Notice: Disturbance of the designated repair area may result in the suspension/revocation of this permit.

COMMENTS:

Environmental Health Specialist

Mecklenburg County services are available without regard to ethnic origin, sex, or disability.

INSTALLATION, CONSTRUCTION, ALTERATION, AND/OR REPAIR APPROVAL


HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 2425 B DATE: 1/15/99

TC: 003-081-53 ☒ L

SERIAL Nº 17771

Permission is hereby given to ✓ (Install or Construct) _____ Alter or Repair the individual septic tank wastewater treatment system with subsurface, soil absorption, effluent discharge as specified herein at the described location. This permit is granted based upon the information supplied in the application dated 3/10/98. All work shall be completed on or before February 15, 1999, after which date this permit shall be null and void. The system shall meet all of the construction requirements of I5A NCAC 18A. 1900 which are in effect on the date of the granting of this permit. A Certificate of Completion or an Operation Permit must be obtained from the Mecklenburg County Health Department before any system can be covered up or placed into service. The issuance of this permit does not in any way guarantee that the system anticipated to be constructed will operate properly, or relieve any person now or hereafter owning, controlling or using such system from any liability resulting from the failure of the system to operate properly.

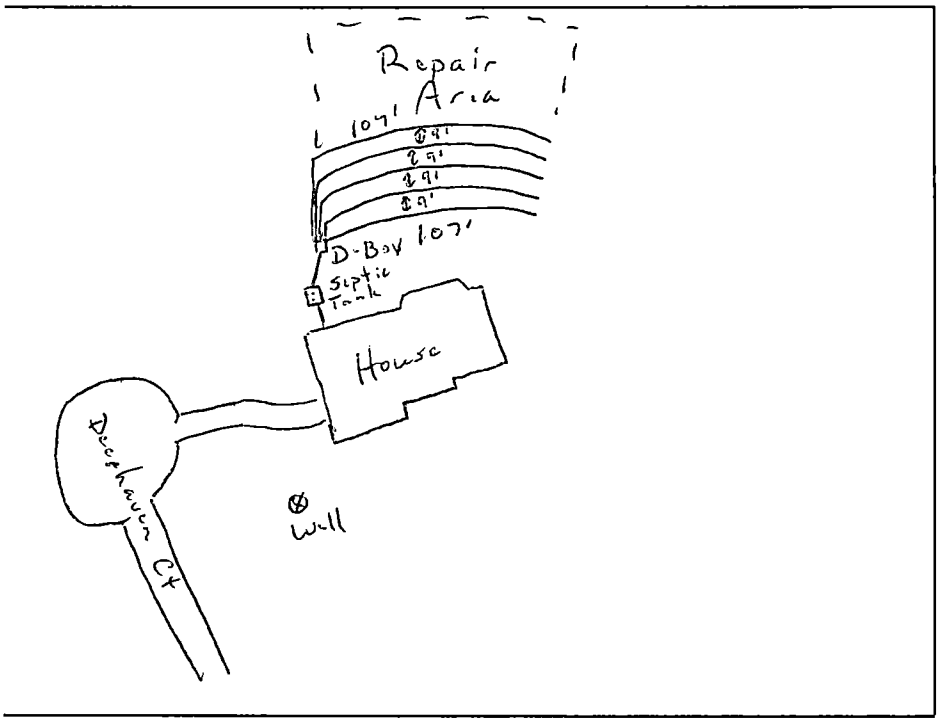

PLOT OF SYSTEM

Liquid Capacity of Septic Tank 1500 gallons

Liquid Capacity of Dosing Tank N/A gallons

Tank Construction Pre-cast Concrete

Trench Depth 30 inches

Absorption and/or Nitrification Lines:

Trench Width 3 feet

Trench Walls Scored and Porous Yes

Total Line Length 535 feet

Number of Lines 5

Depth of Stone 12 inches

Distance from House 5 feet

Distance from Property Line 10 feet

Distance from Well 100' feet

NOTICE: This system shall not be installed while soils are in a wet condition.

NAME OF OWNER Becky Childers

LOCATION OF PROPERTY 15611 Deerhaven Ct. (Runnymede Lot #11 A)

Comments: 4 Bdrm Type II

Jeff A. Knight
Environmental Health Specialist

WHITE - HEALTH DEPARTMENT's COPY • CANARY - E.H.S. COPY • PINK - OWNER OR AGENT's COPY


PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 2425B

TC: 003-081-53

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

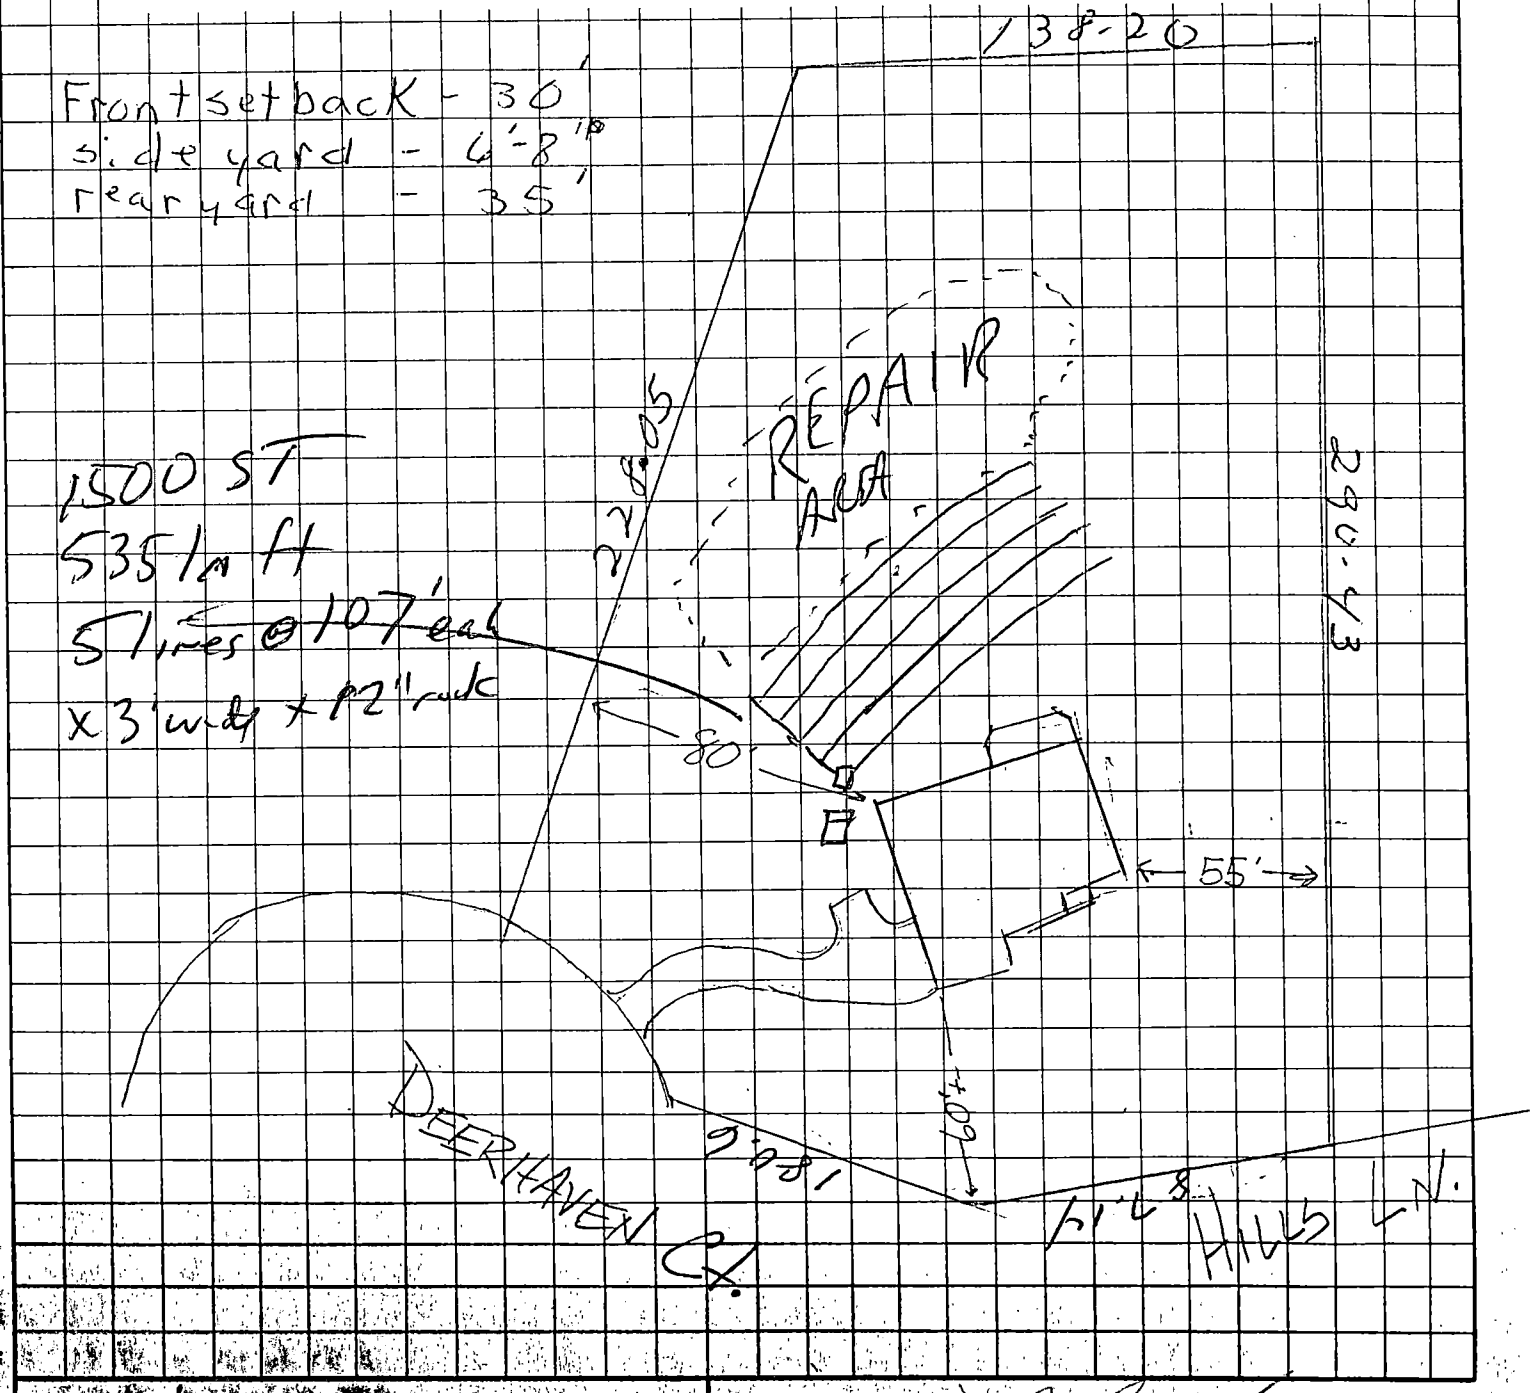

Becky Childers
OWNER/AGENT SIGNATURE

DATE 3-10-98

APPROVAL DATE

White - Health Department's Copy Canary - E.H.S. Copy Pink - Owner's Copy

FEE: 100.00 Chk # 2574

DATE: 3/10/98 JC

APPLICATION FOR IMPROVEMENT PERMIT FOR RESIDENTIAL SITE INDIVIDUAL WATER AND WASTEWATER SYSTEMS PROGRAM

[ ] CRT

TYPE APPLICATION: ___ NEW SYSTEM __ EXPANSION/ ALTERATION OF EXISTING SYSTEM ___ REPAIR OF EXISTING SYSTEM

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENT,
HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

FILE #: 2425B

PROPERTY INFORMATION (FROM ENGINEERING FORM) FOR JOB LOCATION:

TAX/PARCEL NUMBER: 003-081-53 001

STREET ADDRESS: 15611 Deerhaven Ct

SUBDIVISION OR MOBILE HOME PARK NAME: Runneymede

LOT NUMBER: 11A

TYPE OF BUILDING (CHECK ONE):

___ SINGLE MOBILE HOME(S)
___ DOUBLE WIDE (D)
X HOUSE (H)
___ MODULAR HOME (M)
___ MULTIPLE FAMILY (U)
___ OTHER (O)

TOWNSHIP (CHECK ONE):

X 0 MECKLENBURG
___ 1 CHARLOTTE
___ 2 DAVIDSON
___ 3 CORNELIUS
___ 4 PINEVILLE
___ 5 MATTHEWS
___ 6 HUNTERSVILLE
___ 7 MINT HILL

1.2

HEATED SQUARE FOOTAGE:

NUMBER OF BEDROOMS: 4 NUMBER OF OCCUPANTS: 4

CLOSING DATE 3/30/97

FOUNDATION FOR RESIDENCE:

___ WITHOUT BASEMENT
___ ON SLAB
X CRAWL SPACE
___ WITH BASEMENT /PLUMBING
___ WITH BASEMENT /NO PLUMBING

895-9468 →
607-1733

IF EXPANSION/ALTERATION OF EXISTING SYSTEM, DESCRIBE THE PROPOSED BUILDING ADDITION:

WILL THERE BE A HOME BUSINESS IN THE RESIDENCE: ___ YES X NO TYPE: _____

WATER SUPPLY (CHECK ONE):
___ COMMUNITY (C)
___ SHARED WELL (S)
___ MUNICIPAL (M)
___ OTHER 'SPRINGS' (O)
X PRIVATE WELL (P)

IF ANY OF THE FOLLOWING ARE LOCATED ON THE PROPERTY, PLEASE SHOW LOCATION ON PLAT:

BURIED CABLES, LANDFILLS, STUMPHOLES unknown ___ YES ___ NO
EXISTING WASTEWATER SYSTEMS unknown ___ YES ___ NO
EASTMENTS OR RIGHT-OF-WAYS X YES ___ NO
WELL, SPRINGS OR WATERLINES ___ YES X NO
DESIGNATED WETLANDS ___ YES X NO

PROPERTY OWNER:	LEGAL AGENT FOR PROPERTY OWNER, IF APPLICABLE:
NAME: Monica Investments (LAST) (FIRST) (MI)	NAME: ~~Childers~~ (LAST) Childers (FIRST) Becky (MI) A.
ADDRESS: 723 Little Ave. Suite 210	DAYTIME PHONE: (704) 892-7373
CITY: Charlotte STATE: NC ZIP: 28226	Blue Water Realty 19701A Hwy 73
DAYTIME PHONE: (704) 544-5520	Cornelius NC 28031

WHAT DATE WAS THE PROPERTY ORIGINALLY DEEDED AND RECORDED? 11/5/92

An Improvement Permit is subject to suspension or revocation if site plans or the intended use change or if information submitted in this application is falsified or changed. The undersigned, owner, or legal agent for the owner, of the property described above as the "Job Location" has read the foregoing application, acknowledges that the contents of same are true, and authorizes agents of the Mecklenburg County Health Department to enter onto the property for the purpose of processing this request.

SIGNED: Becky Childers DATE: 3-10-98

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR., SUITE 211, 700 N. TRYON ST., CHARLOTTE, N.C. 28202., (704) 336-5102

cash VLW

YGB

FEE: 100.00 **AUTHORIZATION FOR WASTEWATER SYSTEM CONSTRUCTION**
DATE: 9-25-98 **VOID SIXTY (60) MONTHS FROM DATE OF ISSUANCE**

DATE: 3-26-98 **PERMIT NO:** 2425-B
PARCEL NO: 003001-53

JOB LOCATION ADDRESS: 15611 Deerhaven Ct.
PROPERTY OWNER: _____
BUILDING CONTRACTOR: _____
SUBDIVISION NAME: Runneymede
AUTHORIZATION ISSUED BY: Kelly Rowell **DATE:** 3-26-98
DEHNR AUTHORIZED AGENT

AUTHORIZATION CONDITIONS

1. WASTEWATER SYSTEM CONSTRUCTION AND INSTALLATION MUST MEET ALL CONDITIONS AND SPECIFICATIONS AS SET FORTH IN IMPROVEMENT PERMIT NO. 2425-B, AND THE ATTACHED SITE PLAN WITH SYSTEM DETAILS. CONSTRUCTION AND INSTALLATION MUST ALSO MEET ALL REQUIREMENTS SET FORTH IN THE RULES GOVERNING SANITARY SEWAGE COLLECTION, TREATMENT, AND DISPOSAL AND ANY OTHER APPLICABLE RULES AND LAWS.

2. AN INSTALLATION, CONSTRUCTION, ALTERATION AND/OR REPAIR APPROVAL MUST BE SECURED **PRIOR** TO INSTALLATION OF THE SEPTIC TANK SYSTEM. THE INSTALLER OF THE SYSTEM SHALL BE A REGISTERED SEPTIC TANK CONTRACTOR WITH MECKLENBURG COUNTY HEALTH DEPARTMENT.

3. ANY ALTERATION IN SITE OR SOIL CONDITIONS (INCLUDING LOCATION OF STRUCTURES AND APPURTENANCES) OR MODIFICATION IN USE, DESIGN WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS AS SPECIFIED IN THE ASSOCIATED IMPROVEMENT PERMIT AND APPLICATION, MAY SUBJECT THIS AUTHORIZATION AND ASSOCIATED PERMIT(S) TO REVOCATION.

4. OTHER CONDITIONS: _____

OWNER CERTIFICATION

I CERTIFY THAT THERE HAVE BEEN NO ALTERATIONS IN SITE OR SOIL CONDITIONS OR MODIFICATIONS TO FACILITY, WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS FROM THOSE SPECIFIED IN THE ORIGINAL APPLICATION OR ASSOCIATED IMPROVEMENT PERMIT UNLESS AUTHORIZED IN WRITING BY THE MECKLENBURG COUNTY HEALTH DEPARTMENT. I ALSO UNDERSTAND THAT ANY SUCH ALTERATIONS, MODIFICATIONS, OR FALSE INFORMATION ARE GROUNDS FOR REVOCATION OF PERMITS AND AUTHORIZATION TO CONSTRUCT.

X _____ 9/25/98
SIGNATURE OF OWNER/OWNER'S REPRESENTATIVE **DATE**

Permit Number: 2425-B

CONDITIONS OF IMPROVEMENT PERMIT

15611 Deerhaven Ct.

Tax Number: 003-091-53

- The IMPROVEMENT PERMIT is subject to revocation if site plans or the intended use change. There is to be NO grading, filling or disturbance of the soil in the area of the septic tank system or repair area.
- CONSTRUCTION AUTHORIZATION must be obtained prior to receiving a Building Permit. The Construction Authorization is NOT transferable. Do not clear, grade, fill or disturb soil prior to obtaining a Construction Authorization.
- Domestic-type wastewater only. No industrial process wastewater may be discharged into the system.

Basement	___ Yes	✓ No	___ Partial Basement
Type Primary Wastewater System Type (circle one): I (II) III IV V VI	✓ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	___ Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1

3 Long-term acceptance rate	480 Max gallons/day wastewater flow	1200 Absorption Area (sq ft)	9 Trench spacing (min. on centers)
YES Serviced by private well	1500 Gallon septic tank	400 Total trench length (ft)	30" Maximum trench depth (At least 12" of provisionally suitable soil must remain between trench bottom and unsuitable soil conditions)
4 Bedrooms in residence	___ Gallon pump tank	12 Depth of stone	

Any surface waters present: No Type: Minimum separation distance:

Site modifications required:

Additional Conditions:

Repair Area System Type Type (circle one): I (II) III IV V VI	✓ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	___ Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1

1200 Absorption Area (Sq ft) 400 Total Trench Length (Ft)	12" Depth of Stone Trench	9 Trench spacing (min. on centers)	30" Maximum Trench Depth

For existing system, enter the year originally installed:

The undersigned, an authorized agent of the MECKLENBURG COUNTY HEALTH DEPARTMENT, certifies that the Department has approved the Request for the Job Location contained in this document. This approval is granted in accordance with the provisions of Laws and Rules For Sewage, Treatment and Disposal in effect at the time of issuance of the permit and is subject to the following provisions:

- No work shall be conducted on the septic tank system until an Installation, Construction, Alteration and/or Repair Approval is granted by this Department.
- This Improvement permit is transferable.

Kelly Rudd 3-26 98
DEHNR Authorized Agent Date

Owner/Agent Signature Date 9/25/98

MECKLENBURG COUNTY
HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR.
SUITE 211
700 N. TRYON ST.
CHARLOTTE, N.C. 28202.
(704) 336-5102

NORTH CAROLINA DEPARTMENT OF
ENVIRONMENTAL, HEALTH,
AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

COUNTY: _____

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM

(400)

#1 2425B
003-061-53
L 11-A

OWNER: Monica Investment Assn. APPLICANT: _____
ADDRESS: 723 Little Creek, Ste 210 APPLICATION DATE: _____ DATE EVALUATED: _____
PROPOSED FACILITY: residence PROPOSED DESIGN FLOW (.1949): 480gpd PROPERTY SIZE: 1.2
LOCATION OF SITE: 15611 Deerharven PROPERTY RECORDED: _____
WATER SUPPLY: ☑ Private ☐ Public ☐ Well ☐ Spring ☐ Other _____
EVALUATION METHOD: ☑ Auger Boring ☐ Pit ☐ Cut
TYPE OF WASTEWATER: ☑ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	Slopes 5-15% .1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
1	LS	0-4"	gr/cl	Fr/SExPl/SS/SP	>48" TO soil wetness	46"	N/A	None	PS .39 1 F2 IV
		4-38"	sBK/c	Fi/SExPl/SP					
		38-46"	sBK/cl	Fr/SExPl/SS/SP					
2	LS	0-2"	gr/cl	Fr/SExPl/SS/SP	>48" TO soil wetness	42"	N/A	None	PS .39 1 F2 IV
		2-36"	sBK/c	Fi/SExPl/SP					
		36-42"	sBK/cl	Fr/SExPl/SS/SP					
3	LS	0-3"	gr/cl	Fr/SExPl/SS/SP	>48" TO soil wetness	48"	N/A	None	PS .39 1 F2 IV
		3-40"	sBK/c	Fi/SExPl/SP					
		40-48"	sBK/cl	Fr/SExPl/SS/SP					
4	LS	0-2"	gr/cl	Fr/SExPl/SS/SP	>48" TO soil wetness	48"	N/A	None	PS .39 1 PL IV
		2-40"	sBK/c	Fi/SExPl/SP					
		40-48"	sBK/cl	Fr/SExPl/SS/SP					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	PS	PS
System Type(s)		
Site LTAR		

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): Provisionally Suitable
EVALUATED BY: William R. Merlin 3-24-96
OTHER(S) PRESENT: LSS

DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

COUNTY: _____

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

24258

OWNER: _____ APPLICANT: _____
ADDRESS: _____ APPLICATION DATE: _____ DATE EVALUATED: _____
PROPOSED FACILITY: _____ PROPOSED DESIGN FLOW (.1949): _____ PROPERTY SIZE: _____
LOCATION OF SITE: _____ PROPERTY RECORDED: _____
WATER SUPPLY: ☐ Private ☐ Public ☐ Well ☐ Spring ☐ Other _____
EVALUATION METHOD: ☐ Auger Boring ☐ Pit ☐ Cut
TYPE OF WASTEWATER: ☐ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	.1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	.1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
5	LS	0-3"	gr l c l	Fr|SExP|ss|sP	> 48"	48"	N/A	None	PS .39/P2 III
		3-36"	sBK l c	Fi|SExP|sl|P	To Soil				
		36-48"	sBK l c l	Fr|SExP|ss|sP	wetness				
6	LS	0-3"	gr l c l	Fr|SExP|ss|sP	> 48"	48"	N/A	None	PS .39/P2 IV
		3-48"	sBK l c	Fi|SExP|sl|P	To Soil wetness				
3									
4									

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)		
System Type(s)		
Site LTAR		

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): _____

EVALUATED BY: _____
OTHER(S) PRESENT: _____

COMMENTS: 1100 Repair

LEGEND

use the following standard abbreviations

LANDSCAPE POSITION	GROUP	SOIL TEXTURE	CONVENTIONAL 1955 LTAR	LPP 1957 LTAR	MINERALOGY/ CONSISTENCE	STRUCTURE
C (Concave Slope)	I	S (Sand)	1.2 - 0.8	0.6 - 0.4	NEXP (Non-expansive)	G (Single Grain)
V (Convex Slope)		LS (Loamy Sand)			SEXP (Slightly Expansive)	M (Massive)
(Drainage Way)					EXP (Expansive)	CR (Crumb)
S (Debris Slump)	II	SL (Sandy Loam)	0.8 - 0.6	0.4 - 0.3		GR (Granular)
P (Flood Plain)		L (Loam)				SBK (Subangular Blocky)
S (Foot Slope)						ABK (Angular Blocky)
(Head Slope)	III	SI (Silt)	0.6 - 0.3	0.3 - 0.15		PL (Platy)
(Linear Slope)		SICL (Silty Clay Loam)				PR (Prismatic)
(Nose Slope)		CL (Clay Loam)			MOIST	WET
(Ridge)		SCL (Sandy Clay Loam)				
(Shoulder Slope)		SLC (Silt Loam Clay)			VFR (Very Friable)	NS (Non-sticky)
(Terrace)					FR (Friable)	SS (Slightly Sticky)
	IV	SC (Sandy Clay)	0.4 - 0.1	0.2 - 0.05	FI (Firm)	S (Sticky)
		SIC (Silty Clay)			VFI (Very Firm v. Very Sticky)	VS (Very Sticky)
					EFI (Extremely Firm)	NP (Non-plastic)
		O (Organic)	None			SP (Slightly Plastic)
						P (Plastic)
						VP (Very Plastic)

OTES


ORIZON DEPTH	In inches below natural soil surface
EPTH OF FILL	In inches from land surface
ESTRICTIVE HORIZON	Thickness and depth from land surface
APROLITE	S(suitable) or U(unsuitable)
OIL WETNESS	Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation
LASSIFICATION	S (Suitable), PS (Provisionally Suitable), or U (Unsuitable)

valuation of saprolite shall be by pits.
ong-term Acceptance Rate (LTAR): gal/day/ft²

Show profile locations and other site features (dimensions, reference or benchmark, and North).

2452B

Uu - complex slopes

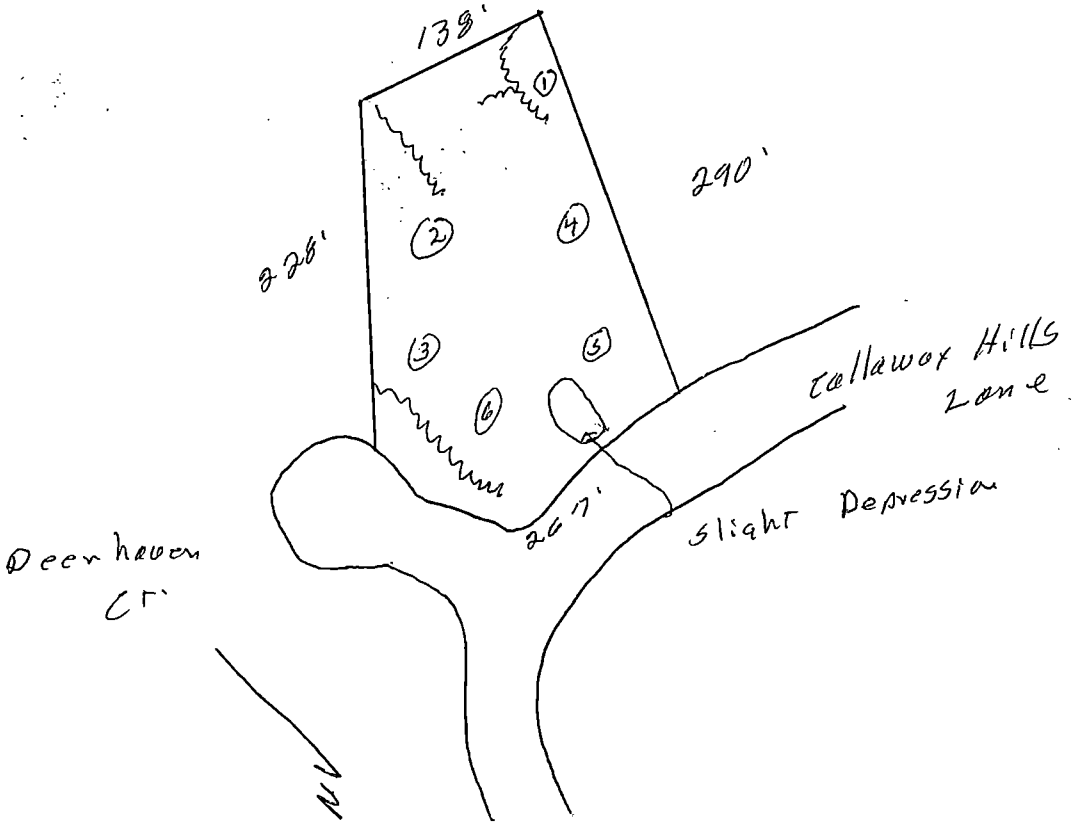

DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

COUNTY: _____

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM

#1 2425B
003-061-53
L 11-A

OWNER: Monica Investment Assn. APPLICANT: _____
ADDRESS: 723 Little Creek, Ste 210 APPLICATION DATE: _____ DATE EVALUATED: _____
PROPOSED FACILITY: residence PROPOSED DESIGN FLOW (.1949): 480gpd PROPERTY SIZE: 1.2
LOCATION OF SITE: 15611 Deerhaven PROPERTY RECORDED: _____
WATER SUPPLY: ☒ Private ☐ Public ☐ Well ☐ Spring ☐ Other _____
EVALUATION METHOD: ☒ Auger Boring ☐ Pit ☐ Cut
TYPE OF WASTEWATER: ☒ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	Slopes 5-15% .1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
1	LS	0-4"	gr/cl	Fr/SEXP/SS/SP	>48" TO soil wetness	48"	N/A	None	PS .391 F2 IV
		4-38"	SBK/C	Fi/SEXP/SP					
		38-46"	SBK/Cl	Fr/SEXP/SS/SP					
2	LS	0-2"	gr/cl	Fr/SEXP/SS/SP	>48" TO soil wetness	42"	N/A	None	PS .391 F2 IV
		2-36"	SBK/C	Fi/SEXP/SP					
		36-42"	SBK/Cl	Fr/SEXP/SS/SP					
3	LS	0-3"	gr/cl	Fr/SEXP/SS/SP	>48" TO soil wetness	48"	N/A	None	PS .391 F2 IV
		3-40"	SBK/C	Fi/SEXP/SP					
		40-48"	SBK/Cl	Fr/SEXP/SS/SP					
4	LS	0-2"	gr/cl	Fr/SEXP/SS/SP	>48" TO soil wetness	48"	N/A	None	PS .391 IV
		2-40"	SBK/C	Fr/SEXP/SP					
		40-48"	SBK/Cl	Fr/SEXP/SS/SP					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	PS	PS
System Type(s)		
Site LTAR		

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): Provisionally Suitable
EVALUATED BY: William R. Merlin 3-24-
OTHER(S) PRESENT: LSS

DIVISION OF ENVIRONMENTAL ...
ON-SITE WASTEWATER SECTION

COUNTY: _____

24258

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

OWNER: _____ APPLICANT: _____
ADDRESS: _____ APPLICATION DATE: _____ DATE EVALUATED: _____
PROPOSED FACILITY: _____ PROPOSED DESIGN FLOW (.1949): _____ PROPERTY SIZE: _____
LOCATION OF SITE: _____ PROPERTY RECORDED: _____
WATER SUPPLY: ☐ Private ☐ Public ☐ Well ☐ Spring ☐ Other _____
EVALUATION METHOD: ☐ Auger Boring ☐ Pit ☐ Cut
TYPE OF WASTEWATER: ☐ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	.1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) STRUCTURE/ TEXTURE	SOIL MORPHOLOGY (.1941) CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	OTHER PROFILE FACTORS .1943 SOIL DEPTH	OTHER PROFILE FACTORS 1956 SAPRO CLASS	OTHER PROFILE FACTORS .1944 RESTR HORIZ	PROFILE CLASS & LTAR
5	LS	0-3"	gr l c l	Fr l SExP l ss/sP	> 48" to soil wetness	48"	N/A	None	PS .39/PL IV
		3-36"	sBK l c	Fr l SExP l sP					
		36-48"	sBK l cl	Fr l SExP l ss/sP					
6	LS	0-3"	gr l cl	Fr l SExP l ss/sP	> 48" to soil wetness	48"	N/A	None	PS .39/PL IV
		3-48"	sBK l c	Fr l SExP l sP					
3									
4									

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)		
System Type(s)		
Site LTAR		

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): _____
EVALUATED BY: _____
OTHER(S) PRESENT: _____

COMMENTS: Lot 2 Repair

LEGEND

use the following standard abbreviations

LANDSCAPE POSITION	GROUP	SOIL TEXTURE	CONVENTIONAL 1955 LTAR	LPP 1957 LTAR	MINERALOGY/ CONSISTENCE	STRUCTURE
C (Concave Slope)	I	S (Sand)	1.2 - 0.8	0.6 - 0.4	NEXP (Non-expansive)	G (Single Grain)
V (Convex Slope)		LS (Loamy Sand)			SEXP (Slightly Expansive)	M (Massive)
(Drainage Way)					EXP (Expansive)	CR (Crumb)
S (Debris Slump)	II	SL (Sandy Loam)	0.8 - 0.6	0.4 - 0.3		GR (Granular)
P (Flood Plain)		L (Loam)				SBK (Subangular Blocky
S (Foot Slope)						ABK (Angular Blocky)
I (Head Slope)	III	SI (Silt)	0.6 - 0.3	0.3 - 0.15		PL (Platy)
(Linear Slope)		SICL (Silty Clay Loam)				PR (Prismatic)
(Nose Slope)		CL (Clay Loam)			MOIST	WET
(Ridge)		SCL (Sandy Clay Loam)				
(Shoulder Slope)		SIC (Silt Loam Clay)			VFR (Very Friable)	NS (Non-sticky)
(Terrace)					FR (Friable)	SS (Slightly Sticky)
	IV	SC (Sandy Clay)	0.4 - 0.1	0.2 - 0.05	FI (Firm)	S (Sticky)
		SIC (Silty Clay)			VFI (Very Firm v. Very Sticky)	VS (Very Sticky)
					EFI (Extremely Firm)	NP (Non-plastic)
		O (Organic)	None			SP (Slightly Plastic)
						P (Plastic)
						VP (Very Plastic)

OTES


ORIZON DEPTH	In inches below natural soil surface
EPTH OF FILL	In inches from land surface
ESTRICTIVE HORIZON	Thickness and depth from land surface
APROLITE	S(suitable) or U(unsuitable)
OIL WETNESS	Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designatic
LASSIFICATION	S (Suitable), PS (Provisionally Suitable), or U (Unsuitable)

valuation of saprolite shall be by pits.
ong-term Acceptance Rate (LTAR): gal/day/ft²

Show profile locations and other site features (dimensions, reference or benchmark, and North).

2452B

Um - complex slopes

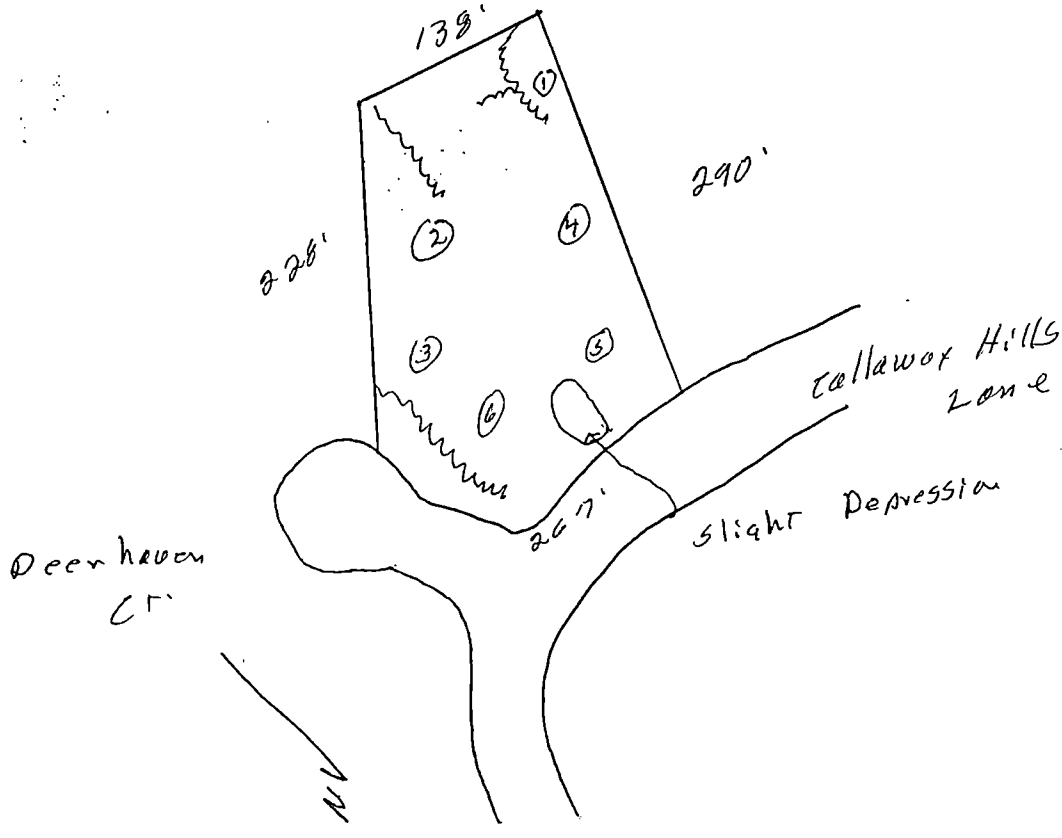

FEE: 100.00 Chk #2579

DATE: 3/10/98 JC

APPLICATION FOR IMPROVEMENT PERMIT FOR RESIDENTIAL SITE INDIVIDUAL WATER AND WASTEWATER SYSTEMS PROGRAM

[ ] CRT

TYPE APPLICATION: ___ NEW SYSTEM __ EXPANSION/ ALTERATION OF EXISTING SYSTEM ___ REPAIR OF EXISTING SYSTEM

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENT,
HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

FILE #: 2425B

PROPERTY INFORMATION (FROM ENGINEERING FORM) FOR JOB LOCATION:

TAX/PARCEL NUMBER: 003-081-53 001

STREET ADDRESS: 15611 Deerhaven

SUBDIVISION OR MOBILE HOME PARK NAME: Runneymede

LOT NUMBER: 11A

TYPE OF BUILDING (CHECK ONE):

___ SINGLE MOBILE HOME(S)
___ DOUBLE WIDE (D)
X HOUSE (H)
___ MODULAR HOME (M)
___ MULTIPLE FAMILY (U)
___ OTHER (O)

TOWNSHIP (CHECK ONE):

X 0 MECKLENBURG
___ 1 CHARLOTTE
___ 2 DAVIDSON
___ 3 CORNELIUS
___ 4 PINEVILLE
___ 5 MATTHEWS
___ 6 HUNTERSVILLE
___ 7 MINT HILL

HEATED SQUARE FOOTAGE:

NUMBER OF BEDROOMS: 4

NUMBER OF OCCUPANTS: 4

CLOSING DATE 3/30/97

FOUNDATION FOR RESIDENCE:

___ WITHOUT BASEMENT
___ ON SLAB
X CRAWL SPACE
___ WITH BASEMENT /PLUMBING
___ WITH BASEMENT /NO PLUMBING

IF EXPANSION/ALTERATION OF EXISTING SYSTEM, DESCRIBE THE PROPOSED BUILDING ADDITION:

WILL THERE BE A HOME BUSINESS IN THE RESIDENCE: ___ YES X NO TYPE: _____

WATER SUPPLY (CHECK ONE):

___ COMMUNITY (C)
___ MUNICIPAL (M)
X PRIVATE WELL (P)
___ SHARED WELL (S)
___ OTHER 'SPRINGS' (O)

IF ANY OF THE FOLLOWING ARE LOCATED ON THE PROPERTY, PLEASE SHOW LOCATION ON PLAT:

BURIED CABLES, LANDFILLS, STUMPHOLES unknown ___ YES ___ NO
EXISTING WASTEWATER SYSTEMS unknown ___ YES ___ NO
EASTMENTS OR RIGHT-OF-WAYS X YES ___ NO
WELL, SPRINGS OR WATERLINES ___ YES X NO
DESIGNATED WETLANDS ___ YES X NO

PROPERTY OWNER:	LEGAL AGENT FOR PROPERTY OWNER, IF APPLICABLE:
NAME: Monica Investments (LAST) (FIRST) (MI)	NAME: ~~Childers~~ (LAST) Childers (FIRST) Becky (MI) A.
ADDRESS: 723 Little Ave. Suite 210	DAYTIME PHONE: (704) 892-7373
CITY: Charlotte STATE: NC ZIP: 28226	Blue Water Realty 19701A Hwy 73
DAYTIME PHONE: (704) 544-5520	Cornelius NC 28031

WHAT DATE WAS THE PROPERTY ORIGINALLY DEEDED AND RECORDED? 11/5/92

An Improvement Permit is subject to suspension or revocation if site plans or the intended use change or if information submitted in this application is falsified or changed. The undersigned, owner, or legal agent for the owner, of the property described above as the "Job Location" has read the foregoing application, acknowledges that the contents of same are true, and authorizes agents of the Mecklenburg County Health Department to enter onto the property for the purpose of processing this request.

SIGNED: Becky Childers DATE: 3-10-98

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR., SUITE 211, 700 N. TRYON ST., CHARLOTTE, N.C. 28202., (704) 336-5102


PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 2425B

TC: 003-081-53

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

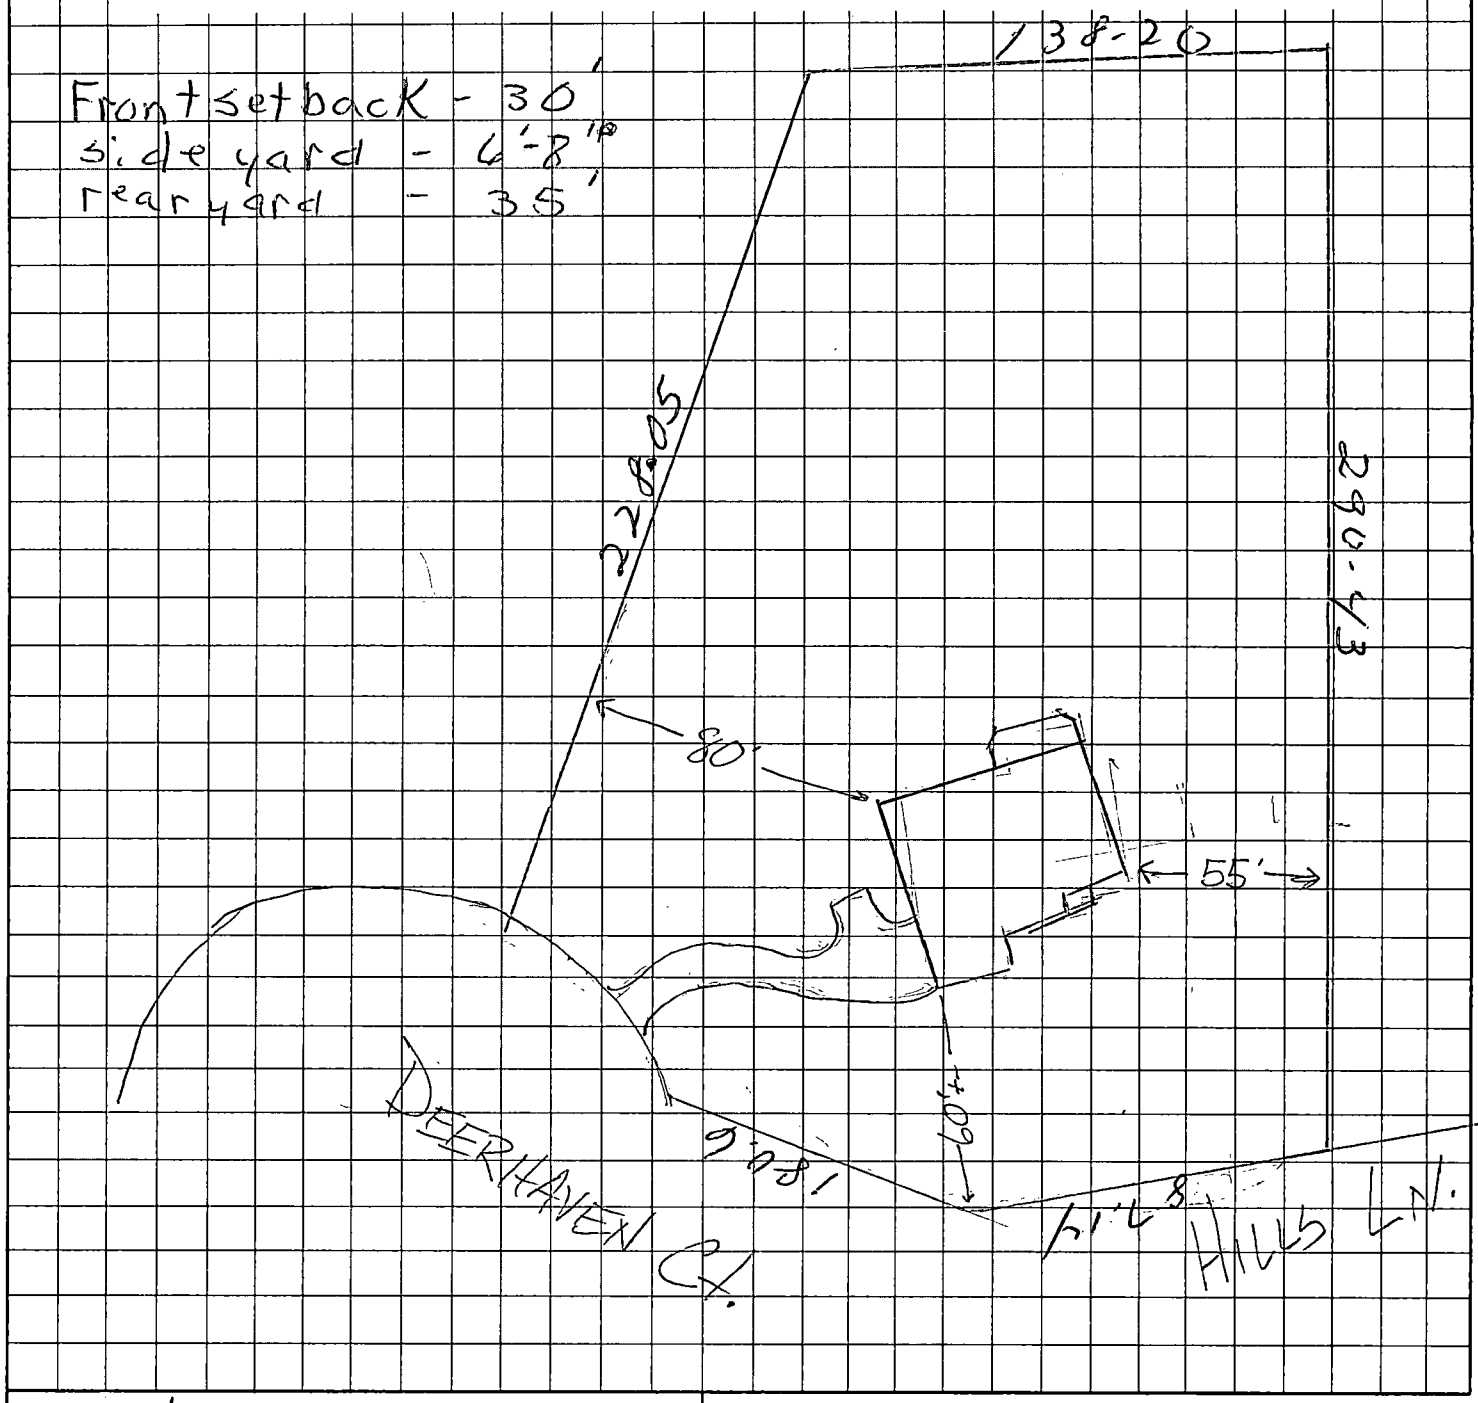

Becky Childers
OWNER/AGENT SIGNATURE

DATE 3-10-98

APPROVAL DATE _____

White - Health Department's Copy Canary - E.H.S. Copy Pink - Owner's Copy

1425B

Blue Water Realty

OFFER TO PURCHASE AND CONTRACT

BLUE WATER REALTY, INC.

Gary and Pat Borch, as Buyer, hereby offer to purchase and Marion Improvements, as Seller, upon acceptance of said offer, agree to sell and convey, all of that plot, piece or parcel of land described below, together with all improvements located thereon and such fixtures and personal property as are listed below (collectively referred to as "the Property"), upon the following terms and conditions:

1. **REAL PROPERTY:** Located in the City of n/a, County of Mecklenburg, State of North Carolina, being known as and more particularly described as: Street Address: 15811 Hawthorne Zip 28036
Legal Description: 15811 Hawthorne
(☑ All ☐ A portion of the property in Deed Reference: Book 3, Page No 8, Mecklenburg, County)
NOTE: Prior to signing the Offer to Purchase and Contract, Buyer is advised to review Restrictive Covenants, if any, which may limit the use of the Property, and to read the Declaration of Restrictive Covenants, By-Laws, Articles of Incorporation, Rules and Regulations, and other governing documents of the owner's association and/or the subdivision, if applicable.

2. **FIXTURES:** The following items, if any, are included in the purchase price free of liens: any built-in appliances, light fixtures, ceiling fans, attached floor coverings, blinds and shades including window hardware, window and door screens, storm windows, combination doors, awnings, gutters, wildlife shelters and receivers, burglar/fire/smoke alarms, pool and spa equipment, solar energy systems, attached fireplace screens, gas logs, fireplace inserts, electric garage door openers with controls, outdoor plants and trees (other than in movable containers), basketball goals, storage sheds, mailboxes, wall mounted mirrors, and any items attached or affixed to the Property, EXCEPT the following items:
none

3. **PERSONAL PROPERTY:** The following personal property is included in the purchase price: none

4. **PURCHASE PRICE:** The purchase price is $ 63,000 and shall be paid as follows:
(a) $ 500 EARNEST MONEY DEPOSIT ☐ cash ☐ personal check ☑ bank check ☐ certified check ☐ other
to be deposited and held in escrow by Manchester Realty as escrow agent, until title is closed, at which time it will be credited to Buyer, or until this contract is otherwise terminated. In the event (1) this offer is not accepted, or (2) any of the conditions herein are not satisfied, then all earnest monies shall be returned to Buyer. In the event of breach of this contract by Seller, upon Buyer's request, all earnest monies shall be returned to Buyer, but such return shall not affect any other remedies available to Buyer for such breach. In the event this offer is accepted and Buyer breaches this contract, then all earnest monies shall be forfeited upon Seller's request, but receipt of such forfeited earnest monies shall not affect any other remedies available to Seller for such breach.
NOTE: In the event of a dispute between Seller and Buyer over the return or forfeiture of earnest money held in escrow by a broker, the broker is required by state law to retain said earnest money in the broker's trust or escrow account until a written release from the parties consenting to its disposition has been obtained or until disbursement is ordered by a court of competent jurisdiction.
(b) $ 1,000 ADDITIONAL EARNEST MONEY DEPOSIT to be paid to escrow agent no later than upon acceptance
(c) $ 0 BY ASSUMPTION of the unpaid principal balance and all obligations of Seller on the existing loan(s) secured by a deed of trust on the Property in accordance with the attached Loan Assumption Addendum
(d) $ 0 BY SELLER FINANCING in accordance with the attached Seller Financing Addendum.
(e) $ 61,500 BALANCE of the purchase price to cash at closing.

5. **CONDITIONS:** (Same N/A in each blank that is not a condition to this contract.)
(a) This Buyer must be able to obtain a loan commitment on or before 3/9/98, effective through the date of closing, for a ☐ FHA ☐ VA (attach FHA/VA Financing Addendum) ☐ Conventional ☑ Other Lot loan at a ☑ Fixed Rate ☐ Adjustable Rate ☐ Other in the principal amount of 16,700.00 for a term of 8 year(s), at the interest rate not to exceed 8 % per annum, with mortgage loan discount points not to exceed 0 % of the loan amount. Buyer agrees to use his best efforts to secure such commitment. Buyer shall be responsible for all costs with respect to any loan obtained by Buyer, except if Seller is to pay any of the Buyers loan closing costs including discount points, those costs are as follows: 0. In the event Buyer fails to provide Seller with written evidence of the loan commitment within five days after receipt of a written request from Seller (but such request may not be made before the loan commitment date listed above), then Seller may terminate this contract unless Buyer waives the loan commitment condition.
(b) There must be no restriction, easement, zoning or other governmental regulation that would prevent the reasonable use of the real property for residential purposes.
(c) The Property must be in substantially the same or better condition at closing as on the date of this offer, reasonable wear and tear excepted.
(d) All deeds of trust, liens and other charges against the Property, not assumed by Buyer, must be paid and satisfied by Seller prior to or at closing such that cancellation may be promptly obtained following closing. Seller shall remain obligated to obtain any such cancellations following closing.
(e) Title must be delivered at closing by GENERAL WARRANTY DEED unless otherwise stated herein, and must be fee simple marketable title, free of all encumbrances except: ad valorem taxes for the current year (prorated through the date of closing), utility easements and unviolated restrictive covenants that do not materially affect the value of the Property, and such other encumbrances as may be assumed or specifically approved by Buyer. The Property must have legal access to a public right of way.

6. **SPECIAL ASSESSMENTS:** Seller warrants that there are no governmental special assessments, either pending or confirmed, for sidewalks, paving, water, sewer, or other improvements on or adjoining the Property, and no owners' association special assessments, except as follows:
none
(Insert "None" or the identification of such assessments, if any.) Seller shall pay all confirmed owners' association assessments and all confirmed governmental assessments, if any, and Buyer shall take title subject to all pending assessments, if any, unless otherwise agreed as follows:
Buyer pays a one time fee of $300.00 at closing to HOA

7. **PRORATIONS AND ADJUSTMENTS:** Unless otherwise provided, the following items shall be prorated and either adjusted between the parties or paid at closing: (a) Ad valorem taxes on real property shall be prorated on a calendar year basis through the date of closing. (b) Ad valorem taxes on personal property for the entire year shall be paid by the Seller unless the personal property is conveyed to the Buyer, in which case, the personal property taxes shall be prorated on a calendar year basis through the date of closing. (c) All late listing penalties, if any, shall be paid by Seller. (d) Rents, if any, for the Property shall be prorated through the date of closing. (e) Owners' association dues, and other like charges shall be prorated through the date of closing. Seller represents that the regular owners' association dues, if any, are $ 225.00 per year.

8. **CLOSING EXPENSES:** Seller shall pay for preparation of a deed and all other documents necessary to perform Seller's obligations under this agreement, and for excise tax (revenue stamps) required by law. Buyer shall pay for recording the deed and for preparation and recording of all instruments required to secure the balance of the purchase price unpaid at closing.

9. **FUEL:** Buyer agrees to purchase from Seller the fuel, if any, situated in any tank on the Property at the prevailing rate with the cost of measurement thereof, if any, being paid by Seller.

10. **EVIDENCE OF TITLE:** Seller agrees to use his best efforts to deliver to Buyer as soon as reasonably possible after the acceptance of this offer, copies of all title information in possession of or available to Seller, including but not limited to, title insurance policies, attorney's opinions on title, surveys, covenants, deeds, notes and deeds of trust and easements relating to the Property.

11. **LABOR AND MATERIAL:** Seller shall furnish at closing an affidavit and indemnification agreement in form satisfactory to Buyer showing that all labor and materials, if any, furnished to the Property within 120 days prior to the date of closing have been paid for and agreeing to indemnify Buyer against all loss from any cause or claim arising therefrom.

12. PROPERTY DISCLOSURE AND INSPECTIONS:

(a) Property Disclosure:

☐ Buyer has received a signed copy of the Residential Property Disclosure Statement prior to the signing of this Offer to Purchase and Contract.

☐ Buyer has NOT received a signed copy of the Residential Property Disclosure Statement and shall have the right to terminate or withdraw this contract without penalty upon receipt of the Residential Property Disclosure Statement provided such termination or withdrawal notice is hand delivered or mailed to Seller or Seller's Agent within three days following receipt of same.

☒ Exempt from Residential Property Disclosure Statement because (SEE GUIDELINES) land

☐ The Property is residential and was built prior to 1978 (Attach Lead-Based Paint or Lead-Based Paint Hazards Disclosure Addendum.)

(b) Property Inspection: Unless otherwise stated herein, or as otherwise provided on an inspection addendum attached hereto, Buyer shall have the option of inspecting or, obtaining at Buyer's expense, inspections to determine the condition of the Property. Unless otherwise stated herein, it is a condition of this contract that: (i) the built-in appliances, electrical system, plumbing system, heating and cooling systems, roof coverings (including flashing and gutters), doors and windows, exterior surfaces, structural components (including foundations, columns, chimneys, floors, walls, ceilings and roofs), porches and decks, fireplaces and flues, crawl space and other ventilation systems (if any), water and sewer systems (public and private) shall be performing the function for which intended and shall not be in need of immediate repair; (ii) there shall be no unusual drainage conditions or evidence of excessive moisture adversely affecting the structure(s); and (iii) there shall be no visible asbestos or existing environmental contamination. Inspections must be completed on or before n/a. Buyer is advised to have any inspections made prior to insurance binders for closing and in sufficient time to permit any required contract to be completed by closing.

(c) Wood-Destroying Insects: Unless otherwise stated herein, Buyer shall have the option of obtaining, at Buyer's expense, a report from a licensed pest control operator on a standard form in accordance with the regulations of the North Carolina Structural Pest Control Committee, stating that there was no visible evidence of wood-destroying insects and containing no indication of visible damage therefrom. The report must be obtained in sufficient time so as to permit treatment, if any, and repairs, if any, to be completed prior to closing. All treatment required shall be paid for by Seller and completed prior to closing, unless otherwise agreed upon in writing by the parties. The Buyer is advised that the inspection cannot determine to the full extent may not always reveal either structural damage or damage caused by insects or organisms other than wood-destroying insects. If new construction, Seller shall provide a standard warranty of termite soil treatment.

(d) Repairs: Pursuant to any inspections in (b) and/or (c) above, if any repairs are necessary, Seller shall have the option of (i) completing them, (ii) providing for their completion, or (iii) refusing to complete them. If Seller elects not to complete or provide for the completion of the repairs, then Buyer shall have the option of (iv) accepting the Property in its present condition, or (v) terminating this contract, in which case all earnest money shall be refunded. Unless otherwise stated herein, or as otherwise provided on an inspection addendum attached hereto, any items not covered by (b) (i), (b) (ii), (b) (iii) and (c) above are excluded from repair negotiations under this contract.

(e) Acceptance: CLOSING SHALL CONSTITUTE ACCEPTANCE OF EACH OF THE SYSTEMS, ITEMS AND CONDITIONS LISTED ABOVE IN ITS THEN EXISTING CONDITION UNLESS PROVISIONS OTHERWISE MADE IN WRITING.

13. REASONABLE ACCESS: Seller will provide reasonable access to Buyer or Buyer's representatives for the purposes of appraisal, inspection, and/or walkthrough. Buyer may conduct a walk-through inspection of the Property prior to closing.

14. CLOSING: Closing shall be defined as the date and time of recording of the deed. All parties agree to execute any and all documents and papers necessary in connection with closing and transfer of title on or before 3/30/98, at a place designated by Buyer. The deed is to be made to Gary D. and Patricia A. Burch.

15. POSSESSION: Unless otherwise provided herein, possession shall be delivered at closing. In the event possession is NOT to be delivered at closing: ☐ a buyer possession before closing agreement is attached, OR, ☐ a seller possession after closing agreement is attached.

16. OTHER PROVISIONS AND CONDITIONS: (ITEMIZE ALL ADDENDA TO THIS CONTRACT AND ATTACH HERETO. SEE LIST OF STANDARD FORM ADDENDA AVAILABLE.)

see attached Additional Provisions addendum

17. RISK OF LOSS: The risk of loss or damage by fire or other casualty prior to closing shall be upon Seller. If the improvements on the Property are destroyed or materially damaged prior to closing, Buyer may terminate this contract by written notice delivered to Seller or Seller's agent and all deposits shall be returned to Buyer. In the event Buyer does not elect to terminate this contract, Buyer shall be entitled to receive, in addition to the Property, any of the Seller's insurance proceeds payable on account of the damage or destruction applicable to the Property being purchased.

18. ASSIGNMENTS: This contract may not be assigned without the written consent of all the parties, but if assigned by agreement, then this contract shall be binding on the assignee and his heirs and successors.

19. PARTIES: This contract shall be binding upon and shall inure to the benefit of the parties (i.e., Buyer and Seller and their heirs, successors and assigns. As used herein, words in the singular include the plural and the masculine includes the feminine and neuter genders, as appropriate.

20. SURVIVAL: If any provision herein contained which by its nature and effect is required to be observed, kept or performed after the closing, it shall survive the closing and remain binding upon and for the benefit of the parties hereto until fully observed, kept or performed.

21. ENTIRE AGREEMENT: This contract contains the entire agreement of the parties and there are no representations, inducements or other provisions other than those expressed herein. All changes, additions or deletions hereto must be in writing and signed by all parties. Nothing contained herein shall alter any agreement between a REALTOR® or broker and Seller or Buyer as contained in any listing agreement, buyer agency agreement, or any other agency agreement between them.

22. EXECUTION: This offer shall become a binding contract when signed by both Buyer and Seller. This contract is executed under seal in several multiple originals, all of which together constitute one and the same instrument, with a signed original being retained by each party and each REALTOR® or broker hereto, and the parties adopt the "SEAL" beside their signatures below.

IF YOU DO NOT UNDERSTAND THIS OFFER TO PURCHASE AND CONTRACT OR FEEL THAT IT DOES NOT PROVIDE FOR YOUR LEGAL NEEDS, YOU SHOULD CONSULT A NORTH CAROLINA REAL ESTATE ATTORNEY BEFORE YOU SIGN IT.

Buyer acknowledges having made an on-site personal examination of the Property prior to making this offer.

Buyer _____ (SEAL) Seller _____ (SEAL)

SS/Tax ID# 077-80-1338 SS/Tax ID# _____

Buyer _____ (SEAL) Seller _____ (SEAL)

SS/Tax ID# 380-82-2281 SS/Tax ID# _____

Date: 3/3/98 Date: 3/4/98

I hereby acknowledge receipt of the earnest money herein set forth and agree to hold and disburse the same in accordance with the terms hereof.

Date: _____ Firm: _____

By: _____

Selling Agent/Firm/Phone Becky Childers/Blue Water Realty

Listing Agent/Firm/Phone Gary Knox/Northstar Realty

Agency is: ☐ Seller's Agent ☐ Buyer's Dual Agent ☐ Buyer's Agent ☐ Seller's Dual Agent

Blue Water Realty

ADDITIONAL PROVISIONS ADDENDUM

BLUE WATER REALTY, INC.

NOTE: All of the following provisions which are marked with an "X" shall apply to the attached Offer to Purchase and Contract. Those provisions marked "N/A" shall not apply.

1. N/A **EXPIRATION OF OFFER:** This offer shall expire unless acceptance is delivered to Buyer or to _____, on or before _____ ☐ AM ☐ PM on _____, or until withdrawn by the Buyer, whichever occurs first.

2. N/A **INTEREST BEARING TRUST ACCOUNT:** Any earnest monies deposited by Buyer may be placed in the interest bearing trust account of the escrow agent named in the Offer to Purchase and Contract. Any interest earned thereon shall belong to the escrow agent in consideration of the expenses incurred by maintaining such account and records therewith.

3. X **SEPTIC TESTS:** This contract is contingent upon Buyer obtaining an Improvement Permit from the County Health Department, that the Property is "SUITABLE" for a conventional ground absorption sewage system for a 4 bedroom home, or _____

All costs and expenses of such soil tests shall be borne by Buyer. If the Property is not suitable for the proposed development, at the option of the Buyer, this contract may be terminated and all earnest monies shall be refunded to Buyer. Buyer shall complete said tests or waive this condition in writing on or before midnight of _____ suitable for _____

All costs and expenses of such soil tests shall be borne by Buyer. If the Property is not suitable for the proposed development, at the option of the Buyer, this contract may be terminated and all earnest monies shall be refunded to Buyer. Buyer shall complete said tests or waive this condition in writing on or before midnight of _____.

5. N/A **FLOOD HAZARD ZONE:** Buyer has been advised that the property is located in an area which the Secretary of HUD has found to have special flood hazards and that it will be necessary to purchase flood insurance in order to obtain any loan secured by the property from any federally regulated financial institution or a loan insured or guaranteed by an agency of the U.S. Government.

6. X **APPRAISAL:** The Property must appraise at a value equal to or exceeding the purchase price or, at the option of the Buyer, this contract may be terminated and all earnest monies shall be refunded to Buyer. In the event this contract is not subject to financing contingency requiring an appraisal, Buyer shall arrange to have the appraisal completed no later than midnight of _____. In any event, the cost of the appraisal shall be borne by the Buyer.

7. N/A **CLOSING OF EXISTING CONTRACT CONTINGENCY:** This contract is contingent upon closing of an existing contract on the Buyer's real property located at: _____

on or before _____. Seller agrees not to continue to market the Property which is the subject of this Offer to Purchase and Contract and will not solicit for secondary offers. If this contingency is not removed on or before midnight on _____, Seller may terminate this contract and all earnest monies shall be returned to Buyer.

8. N/A **RENTAL/INCOME/INVESTMENT PROPERTY:** The Property is subject to existing leases and/or rights of tenants in possession under month-to-month tenancies. Seller agrees to deliver to Buyer on or before _____, true and complete copies of all existing leases, rental agreements, outstanding tenant notices, written statements of all oral tenant agreements, statement of all tenant's deposits, uncured defaults by Seller or tenants, and claims made by or to tenants, if any. This contract is contingent upon Buyer's approval of said documents. Buyer shall be deemed to have approved said documents unless written notice to the contrary is delivered to the Seller or Seller's agent within seven (7) days of receipt of same. If Buyer does not approve said documents and delivers written notice of rejection within the seven day period, this contract shall be terminated and all earnest monies shall be returned to Buyer.

9. N/A **COST OF REPAIR CONTINGENCY:** If the reasonable estimate of the cost of repairs required by the home inspection report as described in Paragraph 12 (b) and the wood destroying insect report as described in Paragraph 12 (c) of the Offer to Purchase and Contract equals or exceeds $ _____ Buyer shall have the option to terminate this contract and all earnest monies shall be returned to Buyer.

IN THE EVENT OF A CONFLICT BETWEEN THIS ADDENDUM AND THE OFFER TO PURCHASE AND CONTRACT, THIS ADDENDUM SHALL CONTROL.

Buyer: _____ (SEAL) Date 3-3-98
Buyer: _____ (SEAL) Date 3-3-98
Seller: _____ (SEAL) Date 3-4-98
Seller: _____ (SEAL) Date

This Standard Form has been approved jointly by the NORTH CAROLINA BAR ASSOCIATION, INC. and NORTH CAROLINA ASSOCIATION OF REALTORS, INC.

Standard Form No. 2-A-11 Copyright 6/95

2425B

MONICA INVESTMENT COMPANY
7523 LITTLE AVENUE, SUITE 210
CHARLOTTE, NORTH CAROLINA 28226-8170
PHONE (704) 544-5520 **FAX (704) 544-5524**

Mach 5, 1998

Mecklenburg County Environmental Health Department
Charlotte, NC

TO Whom it May Concern:

This letter gives you permission to enter Lot No. 11A, 15611 Deerhaven Court to perform a Perk Test for a septic system.

Sincerely

MONICA INVESTMENT COMPANY

Kaye DuMond

Kaye DuMond
Corporate Secretary