

8718 DARTMOOR PL

13905605

1/7/2008

duponbj

Groundwater and Wastewater Services File Imaging Project
May 2007
Barcode Font = IDAutomationHC39M

CERTIFICATE OF COMPLETION/OPERATION PERMIT

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 4654 B DATE: 2-28-02

TC: 139-056-05 ☒ L ☒ CRT

SERIAL Nº 18856

Name of Owner DARLYN HOMES, DAVID REED Juris.: _____

Address of Property 8718 DARTMOOR PLACE

Inspection Data:

Tank Material 1500 ST

Total Length of Drainfield 400

Number of Lines 5 @ 80'

Cover Depth 12"

Water Supply Source MUNICIPAL

Distance to Water Source >10'

Excavation Inspected 2-28-02

Tank(s) Inspected 2-28-02

Wash Line Inspected —

High Water Alarm Inspected —

SEE INSTALLATION

PLOT

Design 1500 ST 1200 SFT CON RC CTR# LARRY TUCKER SEPTIC TANK.

The undersigned has inspected the Septic Tank System described above, and certifies it has been

☐ installed or constructed ☐ altered or repaired

☑ in accordance with the permit issued ☑ as detailed in the plot above

and meets the provisions of I5A NCAC 18A. 1900, "Laws And Rules For Sewage Treatment and Disposal Systems" in effect on the date of issuance of the permit. This issuance of this

☐ Certificate of Completion ☑ Operation Permit

does not in any way guarantee that the system will operate properly or relieve any person now or hereafter owning, controlling, or using such system from any liability resulting from the failure of the system to operate properly. This document is issued subject to those restrictions and conditions shown on the permit(s) and the provisions of I5A NCAC 18A. 1990 in addition to those listed below under "COMMENTS." This document shall be null and void if any information contained in the application is untrue or if any additions are made to the property which would increase the requirements for said system.

Notice: Disturbance of the designated repair area may result in the suspension/revocation of this permit.

COMMENTS: TYPE II

Environmental Health Specialist

Mecklenburg County services are available without regard to ethnic origin, sex, or disability.

INSTALLATION, CONSTRUCTION, ALTERATION, AND/OR REPAIR APPROVAL


HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 4654B DATE: 2-22-02

TC: 139-056-05 ☐ L

SERIAL Nº 18950

Permission is hereby given to _____ Install or Construct, _____ Alter or Repair the individual septic tank wastewater treatment system with subsurface, soil absorption, effluent discharge as specified herein at the described location. This permit is granted based upon the information supplied in the application dated _____. All work shall be completed on or before 5-31-02, after which date this permit shall be null and void. The system shall meet all of the construction requirements of 15A NCAC 18A. 1900 which are in effect on the date of the granting of this permit. A Certificate of Completion or an Operation Permit must be obtained from the Mecklenburg County Health Department before any system can be covered up or placed into service. The issuance of this permit does not in any way guarantee that the system anticipated to be constructed will operate properly, or relieve any person now or hereafter owning, controlling or using such system from any liability resulting from the failure of the system to operate properly.

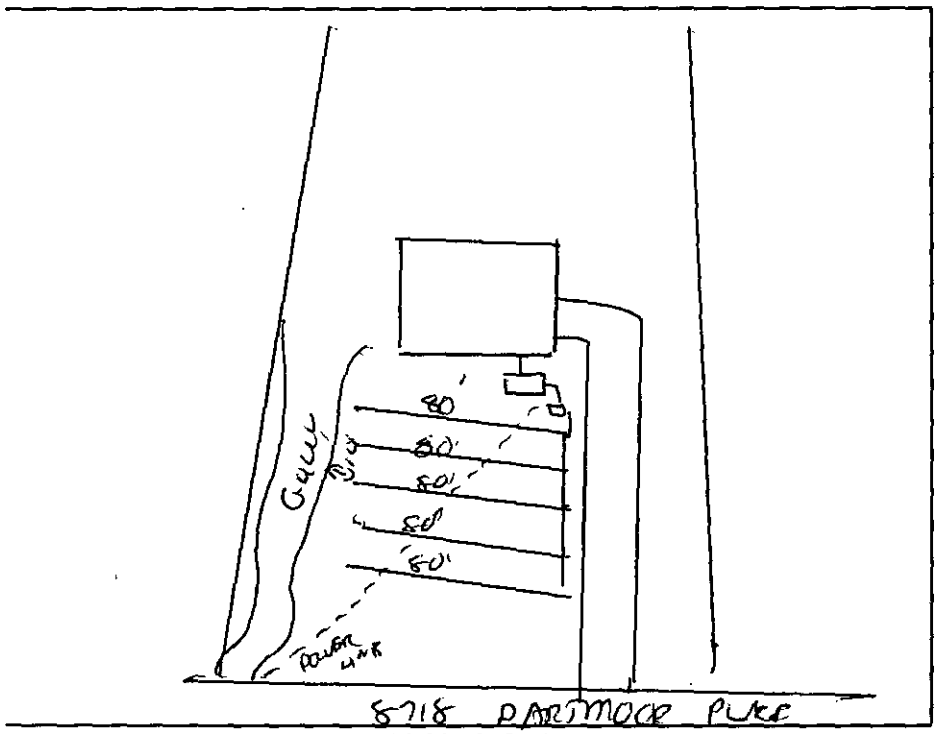

PLOT OF SYSTEM

Liquid Capacity of Septic Tank 1500 gallons

Liquid Capacity of Dosing Tank _____ gallons

Tank Construction PCC

Trench Depth 30"

Absorption and/or Nitrification Lines:

Trench Width 3 feet

Trench Walls Scored and Porous yes

Total Line Length 400 feet

Number of Lines 5

Depth of Stone 12" inches

Distance from House _____ feet

Distance from Property Line 10 feet

Distance from Well >50 feet

NOTICE: This system shall not be installed while soils are in a wet condition.

NAME OF OWNER DARLYN HOMES, DAVID REED

LOCATION OF PROPERTY 8718 DARTMOOR PLACE

Comments: ① MAINTAIN 10' FROM GULLY

② 2-26-02 - POWER COMPANY TRENCHED THROUGH DRAINFIELD AREA PRIOR TO INSTALLATION OF SEPTIC AS INDICATED. CONTRACTOR IS TO LEAVE A 10' EARTH DAM - 5' TO EITHER SIDE AFTER POWER LINE IS REROUTED

Environmental Health Specialist

WHITE - HEALTH DEPARTMENT's COPY • CANARY - E.H.S. COPY • PINK - OWNER OR AGENT's COPY

FEE: 300 RS
DATE: 7/18/02

AUTHORIZATION FOR WASTEWATER SYSTEM CONSTRUCTION

VOID SIXTY (60) MONTHS FROM DATE OF ISSUANCE

ACS

DATE: 7-13-01

PERMIT NO: 46543
PARCEL NO: 139-056-05

JOB LOCATION ADDRESS: 8718 DARTMOOR PLACE
PROPERTY OWNER: JIN WOO LEE
BUILDING CONTRACTOR:
SUBDIVISION NAME: GLENCROFT
AUTHORIZATION ISSUED BY: _____ DATE: 7/13/01
DEHNR AUTHORIZED AGENT

AUTHORIZATION CONDITIONS

1. WASTEWATER SYSTEM CONSTRUCTION AND INSTALLATION MUST MEET ALL CONDITIONS AND SPECIFICATIONS AS SET FORTH IN IMPROVEMENT PERMIT NO. 46543, AND THE ATTACHED SITE PLAN WITH SYSTEM DETAILS. CONSTRUCTION AND INSTALLATION MUST ALSO MEET ALL REQUIREMENTS SET FORTH IN THE RULES GOVERNING SANITARY SEWAGE COLLECTION, TREATMENT, AND DISPOSAL AND ANY OTHER APPLICABLE RULES AND LAWS.

2. AN INSTALLATION, CONSTRUCTION, ALTERATION AND/OR REPAIR APPROVAL MUST BE SECURED PRIOR TO INSTALLATION OF THE SEPTIC TANK SYSTEM. THE INSTALLER OF THE SYSTEM SHALL BE A REGISTERED SEPTIC TANK CONTRACTOR WITH MECKLENBURG COUNTY HEALTH DEPARTMENT.

3. ANY ALTERATION IN SITE OR SOIL CONDITIONS (INCLUDING LOCATION OF STRUCTURES AND APPURTENANCES) OR MODIFICATION IN USE, DESIGN WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS AS SPECIFIED IN THE ASSOCIATED IMPROVEMENT PERMIT AND APPLICATION, MAY SUBJECT THIS AUTHORIZATION AND ASSOCIATED PERMIT(S) TO REVOCATION.

4. OTHER CONDITIONS: (1) MUST SIGN AGREEMENT FORMS.

OWNER CERTIFICATION

I CERTIFY THAT THERE HAVE BEEN NO ALTERATIONS IN SITE OR SOIL CONDITIONS OR MODIFICATIONS TO FACILITY, WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS FROM THOSE SPECIFIED IN THE ORIGINAL APPLICATION OR ASSOCIATED IMPROVEMENT PERMIT UNLESS AUTHORIZED IN WRITING BY THE MECKLENBURG COUNTY HEALTH DEPARTMENT. I ALSO UNDERSTAND THAT ANY SUCH ALTERATIONS, MODIFICATIONS, OR FALSE INFORMATION ARE GROUNDS FOR REVOCATION OF PERMITS AND AUTHORIZATION TO CONSTRUCT.

X _____ 4/18/02
SIGNATURE OF OWNER/OWNER'S REPRESENTATIVE DATE

CONDITIONS OF IMPROVEMENT PERMIT

Permit Number: 4654B

Tax Number: 134-056-05

The IMPROVEMENT PERMIT is subject to revocation if site plans or the intended use change. There is to be NO grading, filling or disturbance of the soil in the area of the septic tank system or repair area.

CONSTRUCTION AUTHORIZATION must be obtained prior to receiving a Building Permit. The Construction Authorization is NOT transferable. Do not clear, grade, fill or disturb soil prior to obtaining a Construction Authorization.

Domestic-type wastewater only. No industrial process wastewater may be discharged into the system.

Basement	___ Yes	___ No	___ Partial Basement	
Type Primary Wastewater System Type (circle one): I II (III) IV V VI	___ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	X Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1	
.3 Long-term acceptance rate	480 Max gallons/day wastewater flow	1600 Absorption Area (sq ft)	9' Trench spacing (min. on centers)	
NO Serviced by private well	1500 Gallon septic tank	400 Total trench length (ft)	25'' Maximum trench depth (At least 12" of provisionally suitable soil must remain between trench bottom and unsuitable soil conditions)	
4 Bedrooms in residence	___ Gallon pump tank	___ Depth of stone		
Any surface waters present:	Type:	Minimum separation distance:		
Site modifications required:				
Additional Conditions: (1) MUST FILL OUT AGREEMENT FORMS.				
Repair Area System Type Type (circle one): I II (III) IV V VI	___ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	X Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1	
1600 Absorption Area (Sq ft) 400 Total Trench Length (Ft)	NA Depth of Stone Trench	9' Trench spacing (min. on centers)	30'' Maximum Trench Depth	
For existing system, enter the year originally installed:				

The undersigned, an authorized agent of the MECKLENBURG COUNTY HEALTH DEPARTMENT, certifies that the Department has approved the Request for the Job Location contained in this document. This approval is granted in accordance with the provisions of Laws and Rules For Sewage, Treatment and Disposal in effect at the time of issuance of the permit and is subject to the following provisions:

- No work shall be conducted on the septic tank system until an Installation, Construction, Alteration and/or Repair Approval is granted by this Department.
- This Improvement permit is transferable.

DEHNR Authorized Agent — Date 7-11-01

X Owner/Agent Signature — Date 9/15/01

MECKLENBURG COUNTY
HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR.
SUITE 211
700 N. TRYON ST.
CHARLOTTE, N.C. 28202.
(704) 336-5102

NORTH CAROLINA DEPARTMENT OF
ENVIRONMENTAL, HEALTH,
AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

IWWS-100105

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 4654 B

TC: 139-056-05

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries, proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.


PERMIT FOR
8718 DARTMOOR PLACE
GLENCROFT SUBDIVISION
LOT # 82

(1) PERMIT DESIGN IS FOR A 4 BEDROOM RESIDENCE WITH A TYPE III-C INNOVATIVE INSTALLATION.

(2) INSTALL DRAINLINES SHALLOW (25") AND ON CONTOUR.

(3) INSTALL 6" OF CLEAN FILL COVER OVER DRAINFIELD.

(4) LOCATE DRAINFIELD AT LEAST 15' FROM 2:1 CUT.

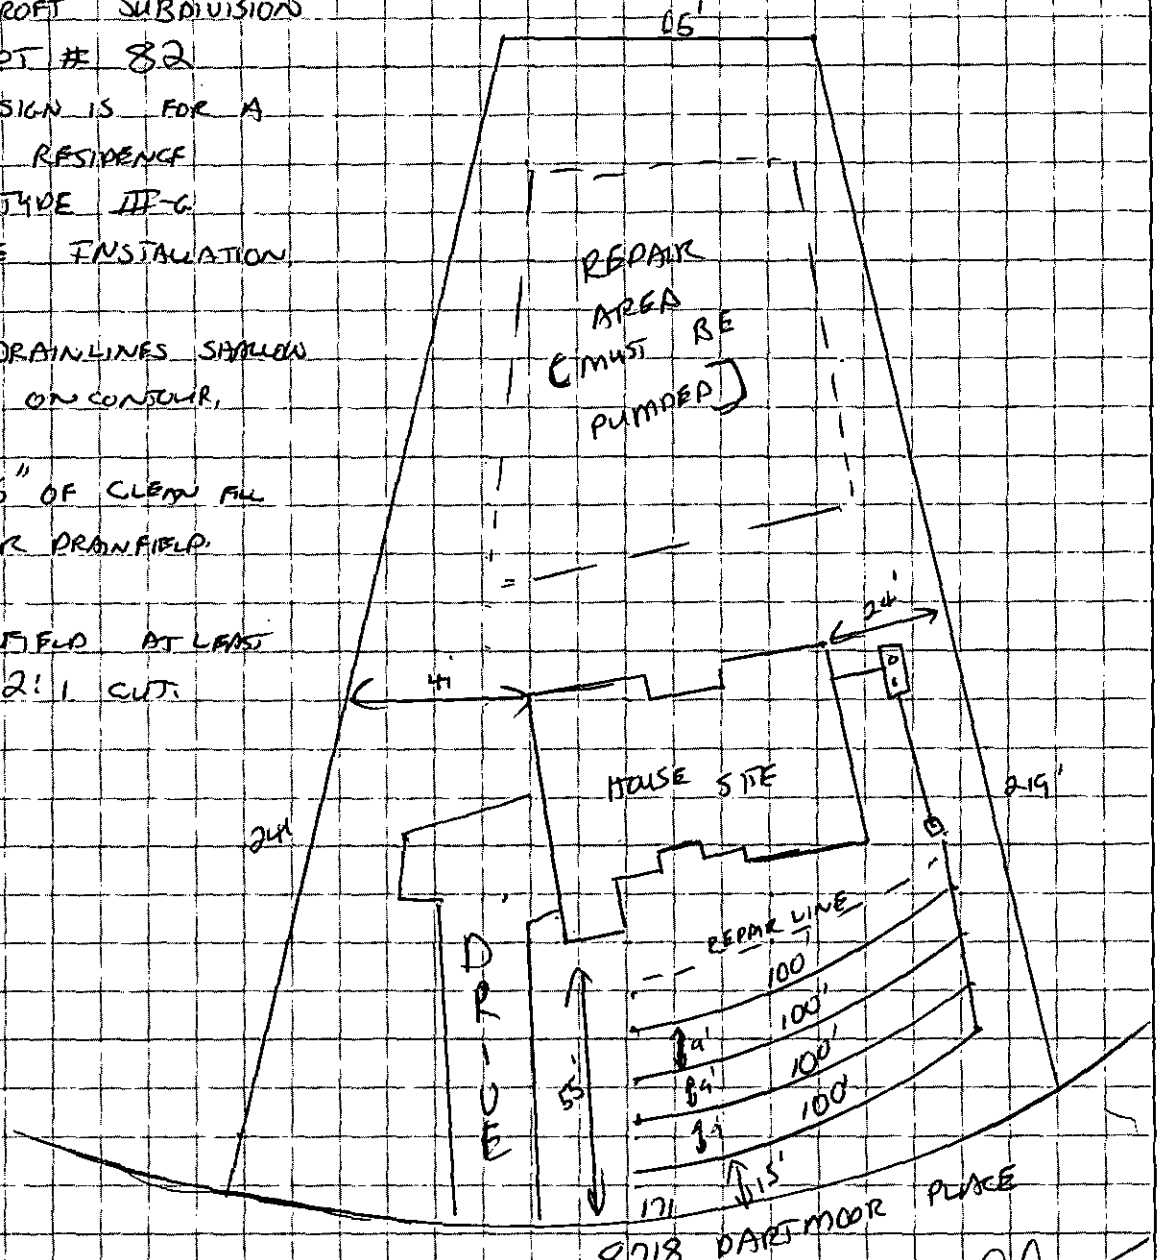

APPROVAL DATE 7-11-01

White - Health Department's Copy Canary - Environmentalist's Copy Pink - Owner's Copy

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102


FILE: 4654 B

TC: 139-056-05

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries, proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

PERMIT FOR
8718 DARTMOOR PLACE
GLENCROFT SUBDIVISION
LOT # 82

1. PERMIT DESIGN IS FOR A 4 BEDROOM RESIDENCE WITH A TYPE III-G INNOVATIVE INSTALLATION
2. INSTALL DRAINLINES SHALLOW (25') AND ON CONTOUR.
3. INSTALL 6" OF CLEAN FILL COVER OVER DRAINFIELD
4. LOCATE DRAINFIELD AT LEAST 15' FROM 2:1 CUT.

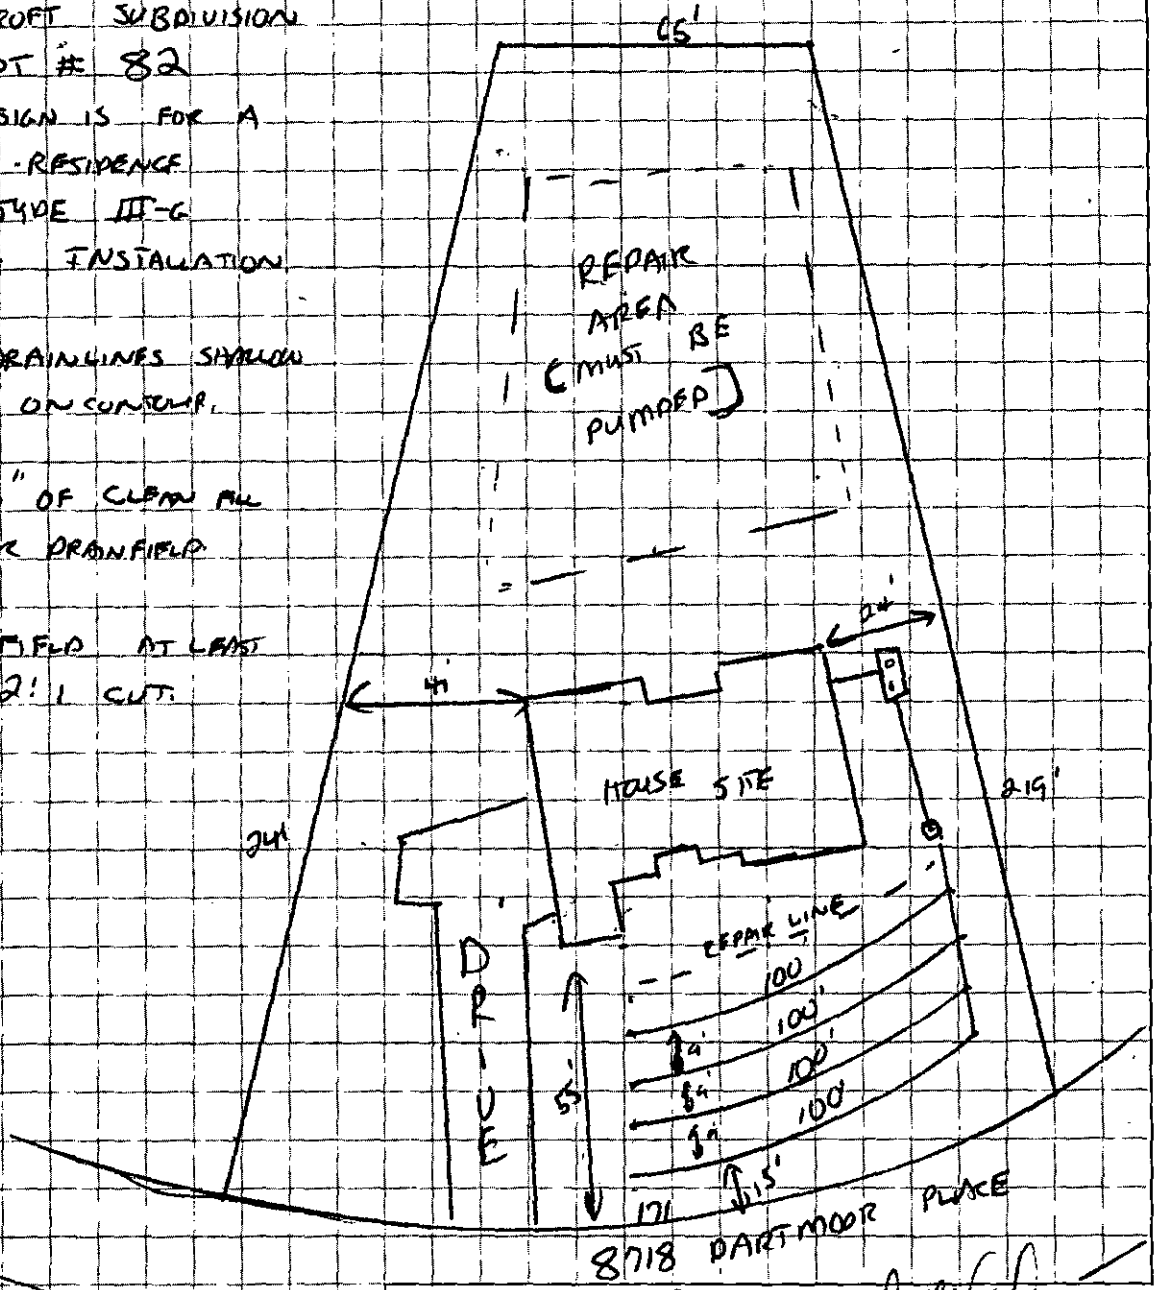

APPROVAL DATE 7-17-01

White - Health Department's Copy Canary - Environmentalist's Copy Pink - Owner's Copy

FOR REGISTRATION JUDITH A. GIBSON
REGISTER OF DEEDS
MECKLENBURG COUNTY, NC
2001 AUG 06 09:55 AM
BOOK:12526 PAGE:685-688 FEE:$12.00
INSTRUMENT # 2001130321

STATE OF NORTH CAROLINA

COUNTY OF MECKLENBURG

WASTEWATER TREATMENT AND DISPOSAL SYSTEM DESIGN AGREEMENT: 15A NCAC 18A .1948 AND ANY OF THE FOLLOWING RULES: .1956; .1957(a); .1957(b); or .1957(c); OR .1969

FILE # 46548

PARCEL # _____

The undersigned, JIN WOO LEE, owner of property located at 8718 Dartmoor Pl., (the "site") and described in an instrument recorded in Book 10895 at Page 256, Mecklenburg Public Registry, hereby acknowledges that the undersigned applied to the Mecklenburg County Health Department (the "Department") for a permit to install a septic tank sewage disposal system on the site; that the Department evaluated the site for suitability for such a system in accordance with the regulations promulgated by the North Carolina Commission for Health Services as 15A NCAC 18A .1900 et seq.; that the Department originally classified the site as "unsuitable" pursuant to the standards set forth in the regulations; that the undersigned requested that the Department reclassify the site as "provisionally suitable" in light of the particular septic tank system proposed by the undersigned; that the Department considered various studies, data, and other information which indicate to the Department that the septic tank system proposed by the undersigned is allowed by the rules; and that the Department therefore reclassified the site as "provisionally suitable" and issued an appropriate permit for such proposed septic tank system.

The undersigned further acknowledges that the proper design, construction, operation and maintenance of such septic tank system is the responsibility of the designer, owner, developer, installer, or user of the system, as applicable, and that neither the Department nor its officials, employees, or agents warrant or guarantee that the said system installed pursuant to the permit issued by the Department will function in a satisfactory manner for any given period of time or that the Department, its officials, employees or agents assume any liability for any damages of any kind which are caused, or which may be caused, by a malfunction of such system.

The undersigned further acknowledges that the following conditions will apply to the site:

- Any changes on the property may make the Improvement Permit Null and void and may make the Improvement Permit subject to revocation.

This instrument was prepared by: Jin Woo Lee

Mail after recording to: 9518 Grove Hill Dr. #315
Charlotte, NC 28262

- Do not grade, cut, fill, pave, construct a building or deck, dig a well, install a swimming pool or otherwise cover or disturb the soil (except for planting and maintaining grass or other ground covers) in a manner which will adversely affect the repair area or area where the septic tank system is located.

- When a private certified operator is required, no improvement permit for the designated repair shall be issued unless there is a private certified operator to carry out this management program in the service area where the proposed system is to be located. (Refer to Rule .1961, "Maintenance of Sewage Systems," for further information.)

- Additional fees will be required according to the Mecklenburg County user fee schedule applicable at the time for the issuance of a repair permit for any subsequent repairs to the sewage treatment and disposal system or for installation of a replacement system.

- At the time repairs to the sewage treatment and disposal system are to be made or a replacement system installed, the regulations in effect at that time will govern the repairs or installation of a replacement system.

The undersigned further agrees for himself, his heirs and assigns that he shall indemnify and hold harmless the Department, its employees, and officials, as well as Mecklenburg County and its employees and officials, for any damages or other claims of any person or persons whatsoever arising out of the installation, operation, or failure of said septic tank system.

Use of the singular masculine pronoun forms herein shall be deemed to also include the plural and feminine forms as the context may require.

This document shall be placed on the public records of the Register of Deeds of Mecklenburg County and indexed therein under the Grantor Index in the name or names of the undersigned, and the foregoing acknowledgements shall henceforth be binding on all persons claiming any right, title, or interest in the site.

IN WITNESS WHEREOF, the undersigned has hereunto set his hand and seal, or if corporate, has caused this instrument to be signed in its corporate name by its duly authorized officers and its seal to be hereunto affixed by authority of its Board of Directors, this 6 day of AST, 19 2001.

_____ (SEAL)
(Corporate Name)

_____ (SEAL)

By: _____ _____ (SEAL)

_____ President _____ (SEAL)

ATTEST:

_____

_____ Secretary

(Corporate Seal)

STATE OF NORTH CAROLINA
COUNTY OF Mecklenburg


I, Chris Bryant, a Notary Public for said County and State, do hereby certify that Jim Wood Lee (NCDL) personally appeared before me this date and acknowledged the due execution of the foregoing instrument.

WITNESS my hand and notarial seal, this 6th day of August, 2001

Chris Bryant
Notary Public

My Commission Expires:
7-10-05

CHRIS BRYANT NOTARY PUBLIC MECKLENBURG COUNTY, N. C.

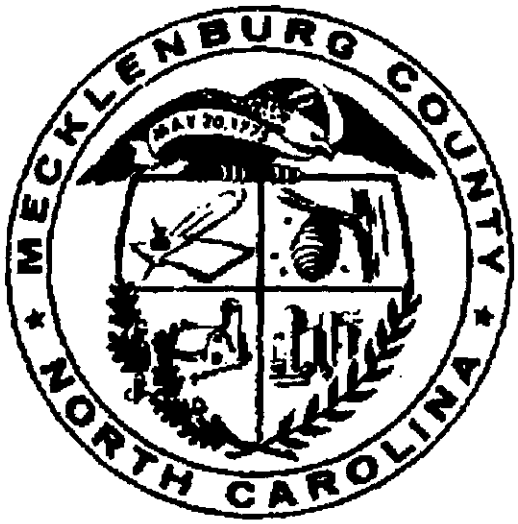

JUDITH A. GIBSON
REGISTER OF DEEDS , MECKLENBURG COUNTY
COUNTY & COURTS OFFICE BUILDING
720 EAST FOURTH STREET
CHARLOTTE NC 28202

****

Filed For Registration: 08/06/2001 09:55 AM

Book: RE 12526 Page: 685-688

Document No.: 2001130321

PRMIT 4 PGS $12.00

Recorder: EMEM DREHER


****

State of North Carolina, County of Mecklenburg

The foregoing certificate of CHRIS BRYANT Notary is certified to be correct. This 6TH of August 2001

JUDITH A. GIBSON, REGISTER OF DEEDS By: _____
Deputy/Assistant Register of Deeds

****



2001130321

Attn: Andrew / Septic/Sewer dept.

From: Shannon / Han's Const. Co, Inc.

Date: 07-11-01

Re: Lot #82 Subdivision: Glenecroft

For: Jin W. Lee

Here is the information that you requested for lot # 82.

Please let me know ASAP if perk passes. Thanks

Shannon.

7-11-01

704-821-0704

Walter Gordon And Associates

Lot 82, Glencroft, Phase 2

Property Of:
Hans Construction Co.
Clear Creek Township, Mecklenburg Co., N.C.
Scale: 1" = 40' Date: 18 June 2001

Walter Gordon And Associates
212 South Hayne Street, Monroe N.C. (704) 289-1408

Project: 84GCroft Dwg.: 82Glencroft

6487

DEPARTMENT OF ENVIRONMENT, HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

#2 ACJ

Sheet: _____
Property ID: 139-056-05
Lot #: 82
File #: 46543

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

OWNER: Glenwood Assoc. APPLICANT: Jim Allen Lee
ADDRESS: 131 Providence Road, Thurlett DATE EVALUATED: 6-21-01
PROPOSED FACILITY: residence PROPOSED DESIGN FLOW (.1949) ~~360~~ 440gpd PROPERTY SIZE: .63
LOCATION OF SITE: 876 Dalmore Blvd PROPERTY RECORDED: _____
WATER SUPPLY: ☐Private ☐Public ☐Well ☐Spring ☑Other Community
EVALUATION METHOD: ☑Augur Boring ☐Pit ☐Cut
TYPE OF WASTEWATER: ☐Sewage ☐Industrial Process ☐Mixed

PROFILE #	Slopes 5-12% .1940 Landscape Position/ Slope %	Horizon Depth (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	.1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS &LTAR
1	LS	0-5"	gr/cl	Fr/SE/Pl/ss/sp	37" to soil wetness	37"	N/A	None	PS .39 F2 IV
		5-37"	SBK/c	Fi/SE/Pl/s/p					
2	LS	0-3"	gr/cl	Fr/SE/Pl/ss/sp	37" to soil wetness	37"	N/A	None	PS .39 F2 IV
		3-37"	SBK/c	Fi/SE/Pl/s/p					
3	LS	0-4"	gr/cl	Fr/SE/Pl/ss/sp	27" to soil wetness	27"	N/A	None	US .15 gpf F2 (LPP) IV
		4-27"	SBK/c	Fi/SE/Pl/s/p					
4	LS	0-4"	gr/cl	Fr/SE/Pl/ss/sp	32" to soil wetness	32"	N/A	None	US .39 F2 IV
		4-32"	SBK/c	Fi/SE/Pl/s/p					
5	LS	0-2"	gr/cl	Fr/SE/Pl/ss/sp	44" to soil wetness	44"	N/A	None	PS .39 F2 IV
		2-21"	SBK/c	Fi/SE/Pl/s/p					
		21-44"	SBK/cl	Fr/SE/Pl/ss/sp					
6	LS	0-3"	gr/cl	Fr/SE/Pl/ss/sp	48" to soil wetness	48"	N/A	None	PS .39 F2 IV
		3-45"	SBK/c	Fi/SE/Pl/s/p					
		45-48"	SBK/cl	Fr/SE/Pl/ss/sp					
7	LS	0-2"	gr/cl	Fr/SE/Pl/ss/sp	48" to soil wetness	48"	N/A	None	PS .39 F2 IV
		2-40"	SBK/c	Fi/SE/Pl/s/p					
		40-48"	SBK/cl	Fr/SE/Pl/ss/sp					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	US	US
System Type(s)		
Site LTAR	.39 F2	.39 F2

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): Unsuitable
EVALUATED BY: W. A. Mali LSS 6-22-01
OTHER(S) PRESENT: _____

FILE # 46543

COMMENTS 1002 Repair

LANDSCAPE POSITION	GROUP	TEXTURE	.1955 LTAR
R-RIDGE	I	S-SAND	1.2-0.8
S-SHOULDER SLOPE		LS-LOAMY SAND	
L-LINEAR SLOPE			
FS-FOOT SLOPE	II	SL-SANDY LOAM	0.8-0.6
N-NOSE SLOPE		L-LOAM	
H-HEAD SLOPE			
CC-CONCLAVE SLOPE	III	SI-SILT	0.6-0.3
CV-CONVEX SLOPE		SICL-SILTY CLAY LOAM	
T-TERRACE		CL-CLAY LOAM	
FP-FLOOD PLAIN		SCL-SANDY CLAY LOAM	
	IV	SC-SANDY CLAY	0.4-0.1
		SIC-SILTY CLAY	
		O-ORGANIC	

CONSISTENCE MOIST	CONSISTENCE WET
VFR-VERY FRIABLE	NS-NON-STICKY
FR-FRIABLE	SS-SLIGHTLYSTICKY
FI-FIRM	S-STICKY
VFI-VERY FIRM	VS-VERY STICKY
EFI-EXTREMELY FIRM	NP-NON-PLASTIC
	SP-SLIGHTLYSTICKY
	P-PLASTIC
	VP-VERY PLASTIC


STRUCTURE

SG-SINGLE GRAIN
M-MASSIVE
CR-CRUMB
GR-GRANULAR
SBK-SUBANGULAR BLOCKY
ABK-ANGULAR BLOCKY
PL-PLATY
PR-PRISMATIC

MINERALOGY

SLIGHTLY EXPANSIVE

EXPANSIVE

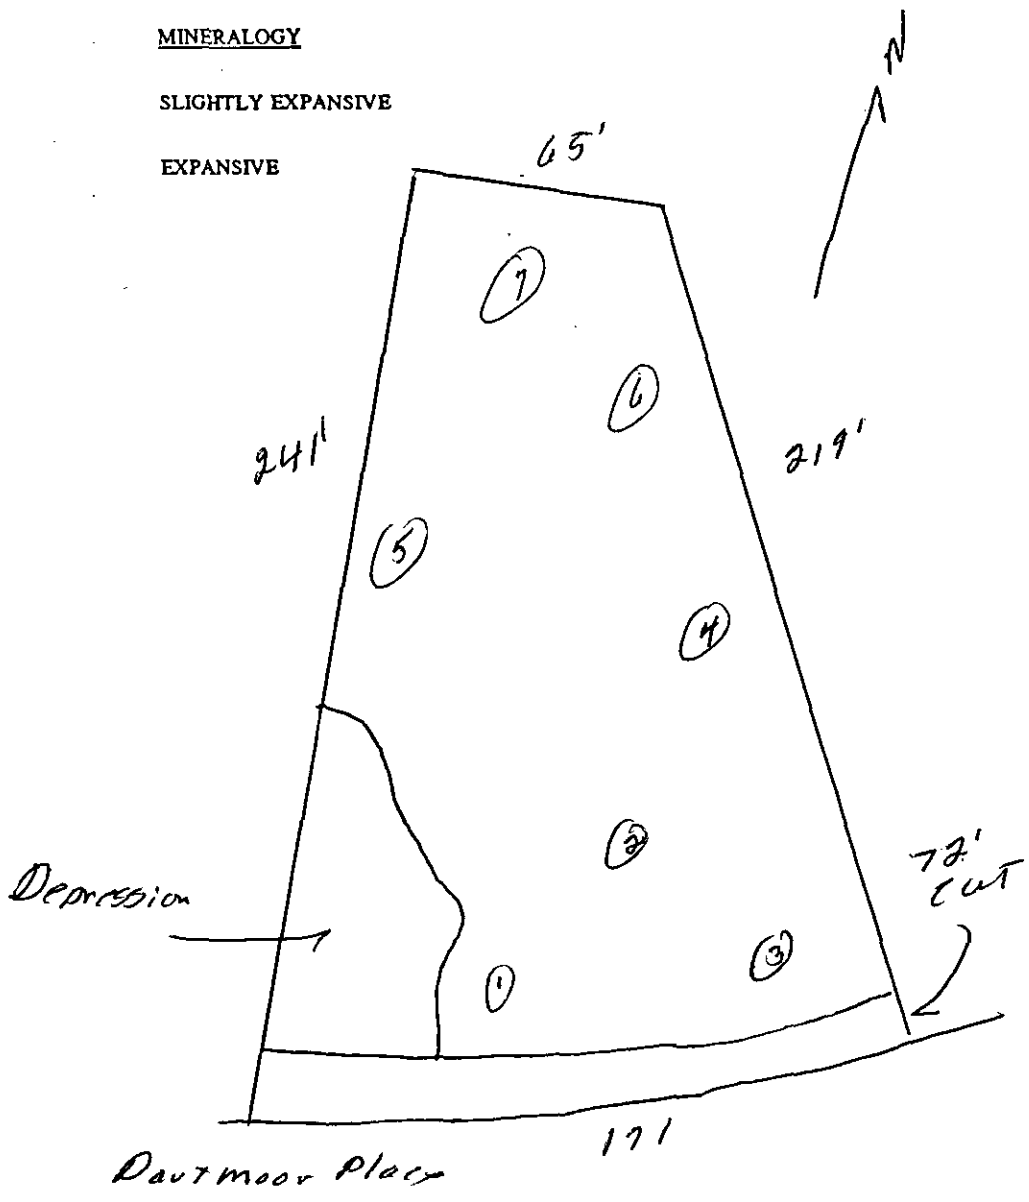

FEE: _____

DATE: _____

APPLICATION FOR IMPROVEMENT PERMIT
FOR RESIDENTIAL SITE
INDIVIDUAL WATER AND WASTEWATER
SYSTEMS PROGRAM

Paid 5/31/01 RF
APP# 066556 [ ] CRT

TYPE APPLICATION: __ NEW SYSTEM __ EXPANSION/ ALTERATION OF EXISTING SYSTEM __ REPAIR OF EXISTING SYSTEM

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENT,
HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

FILE #: 4654B

PROPERTY INFORMATION (FROM ENGINEERING FORM) FOR JOB LOCATION:

TAX/PARCEL NUMBER: 139-056-05

STREET ADDRESS: 8718 Dartmoore Place

SUBDIVISION OR MOBILE HOME PARK NAME: Glen Croft Subdivision

LOT NUMBER: #82

TYPE OF BUILDING (CHECK ONE):

__ SINGLE MOBILE HOME(S)
__ DOUBLE WIDE (D)
✓ HOUSE (H)
__ MODULAR HOME (M)
__ MULTIPLE FAMILY (U)
__ OTHER (O)

TOWNSHIP (CHECK ONE):

__ 0 MECKLENBURG
__ 1 CHARLOTTE
__ 2 DAVIDSON
__ 3 CORNELIUS
__ 4 PINEVILLE
__ 5 MATTHEWS
__ 6 HUNTERSVILLE
✓ 7 MINT HILL

HEATED SQUARE FOOTAGE: 2655

NUMBER OF BEDROOMS: 4 NUMBER OF OCCUPANTS: 3

CLOSING DATE 7-31-01

FOUNDATION FOR RESIDENCE:

__ WITHOUT BASEMENT ON SLAB
✓ CRAWL SPACE
__ WITH BASEMENT /PLUMBING
__ WITH BASEMENT /NO PLUMBING

IF EXPANSION/ALTERATION OF EXISTING SYSTEM, DESCRIBE THE PROPOSED BUILDING ADDITION:

WILL THERE BE A HOME BUSINESS IN THE RESIDENCE: __ YES ✓ NO TYPE: _____

WATER SUPPLY (CHECK ONE):

✓ COMMUNITY (C)
__ MUNICIPAL (M)
__ PRIVATE WELL (P)
__ SHARED WELL (S)
__ OTHER 'SPRINGS' (O)

IF ANY OF THE FOLLOWING ARE LOCATED ON THE PROPERTY, PLEASE SHOW LOCATION ON PLAT:

BURIED CABLES, LANDFILLS, STUMPHOLES __ YES ✓ NO
EXISTING WASTEWATER SYSTEMS __ YES ✓ NO
EASTMENTS OR RIGHT-OF-WAYS __ YES ✓ NO
WELL, SPRINGS OR WATERLINES __ YES ✓ NO
DESIGNATED WETLANDS __ YES ✓ NO

PROPERTY OWNER:	LEGAL AGENT FOR PROPERTY OWNER, IF APPLICABLE:
NAME: Lee (LAST) Jin (FIRST) Woo (MI)	NAME: (LAST) (FIRST) (MI)
ADDRESS: 8718 Dartmoore Place	DAYTIME PHONE: ( ) -
CITY: Mint Hill STATE: NC ZIP: 28227	
DAYTIME PHONE: 704 821 0704	

WHAT DATE WAS THE PROPERTY ORIGINALLY DEEDED AND RECORDED? _____

An Improvement Permit is subject to suspension or revocation if site plans or the intended use change or if information submitted in this application is falsified or changed. The undersigned, owner, or legal agent for the owner, of the property described above as the "Job Location" has read the foregoing application, acknowledges that the contents of same are true, and authorizes agents of the Mecklenburg County Health Department to enter onto the property for the purpose of processing this request.

SIGNED: _____ DATE: 5-31-01

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR., SUITE 211, 700 N. TRYON ST., CHARLOTTE, N.C. 28202., (704) 336-5102

PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: _____


TC: 139-056-05

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries, proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

Permit FOR

8718 Dartmoore Place
Mint Hill, NC 28227

Lot #82

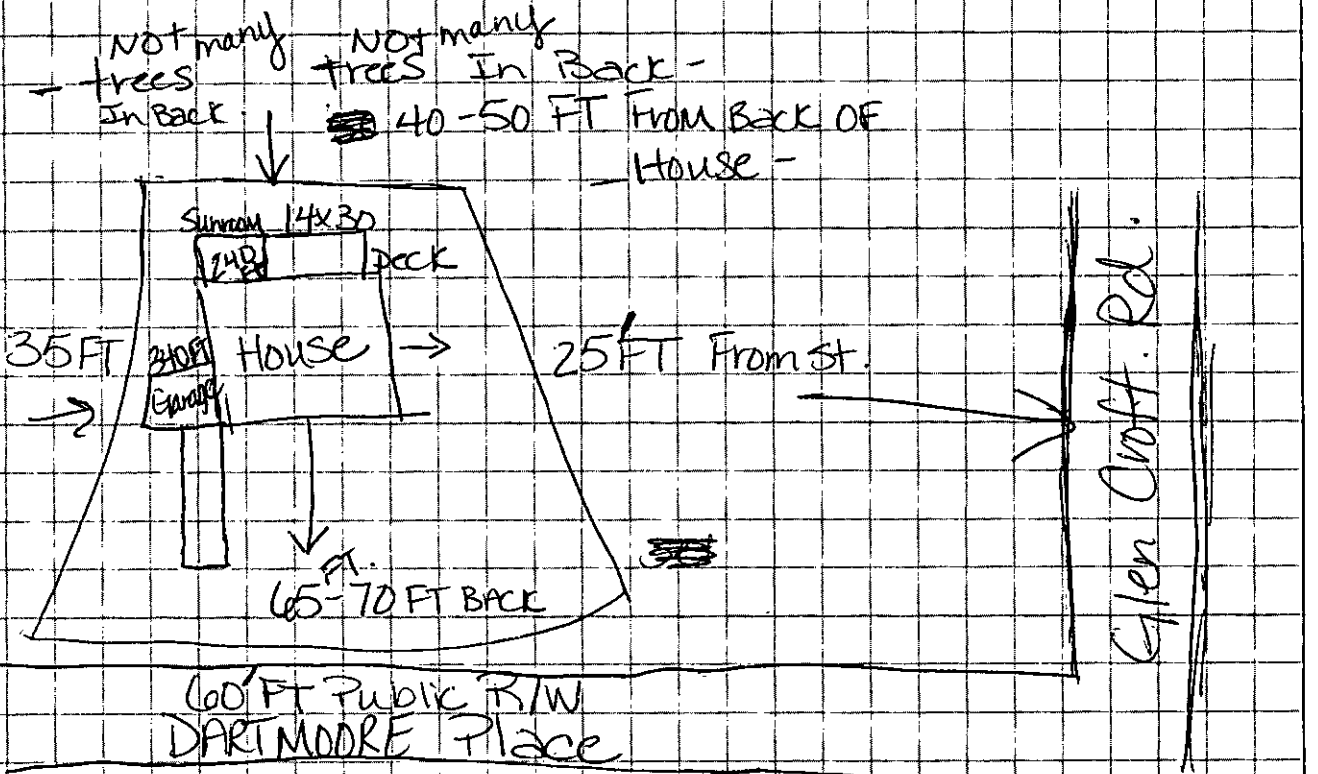

APPROVAL DATE _____

White - Health Department's Copy Canary - Environmentalist's Copy Pink - Owner's Copy