

13515 HAMILTON RD

21909112

1/7/2008

duponbj

Groundwater and Wastewater Services File Imaging Project
May 2007
Barcode Font = IDAutomationHC39M

13504 Hamilton

INSTALLATION, CONSTRUCTION, ALTERATION, AND/OR REPAIR APPROVAL


HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 50443 DATE: 02/03/03

TC: 214-09-131 ☐ L

SERIAL 19214

Permission is hereby given to _____ Install or Construct, _____ Alter or Repair the individual septic tank wastewater treatment system with subsurface, soil absorption, effluent discharge as specified herein at the described location. This permit is granted based upon the information supplied in the application dated _____. All work shall be completed on or before _____, after which date this permit shall be null and void. The system shall meet all of the construction requirements of 15A NCAC 18A. 1900 which are in effect on the date of the granting of this permit. A Certificate of Completion or an Operation Permit must be obtained from the Mecklenburg County Health Department before any system can be covered up or placed into service. The issuance of this permit does not in any way guarantee that the system anticipated to be constructed will operate properly, or relieve any person now or hereafter owning, controlling or using such system from any liability resulting from the failure of the system to operate properly.

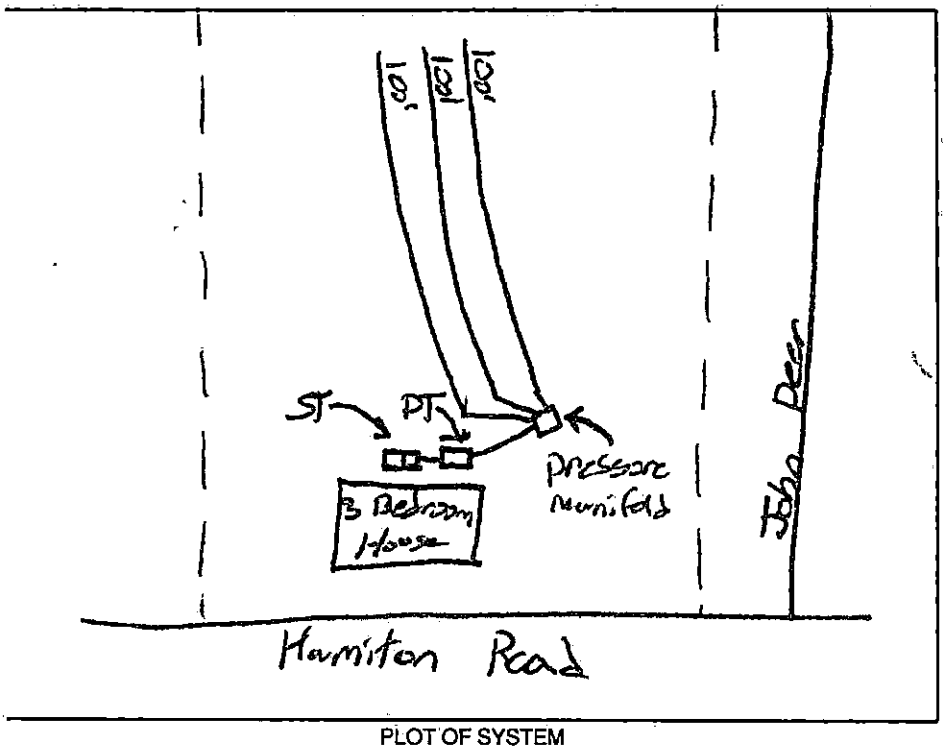

PLOT OF SYSTEM

Liquid Capacity of Septic Tank 1500 gallons

Liquid Capacity of Dosing Tank 1000 gallons

Tank Construction Pcc

Trench Depth 36'

Absorption and/or Nitrification Lines:

Trench Width 3' feet

Trench Walls Scored and Porous Yes

Total Line Length 300' feet

Number of Lines 3

Depth of Stone N/A inches

Distance from House >5' feet

Distance from Property Line >10' feet

Distance from Well >100' feet

NOTICE: This system shall not be installed while soils are in a wet condition.

NAME OF OWNER Richard Creighton

LOCATION OF PROPERTY 13515 Hamilton Road

Comments: Install Sch 80', Pressure manifold, 1500 septic Tank 1000 pump Tank.

Brad Sorey R.S.

Environmental Health Specialist

WHITE - HEALTH DEPARTMENT's COPY • CANARY - E.H.S. COPY • PINK - OWNER OR AGENT's COPY


PROPOSED PLOT PLAN

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 50443

TC: 219-09-131

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

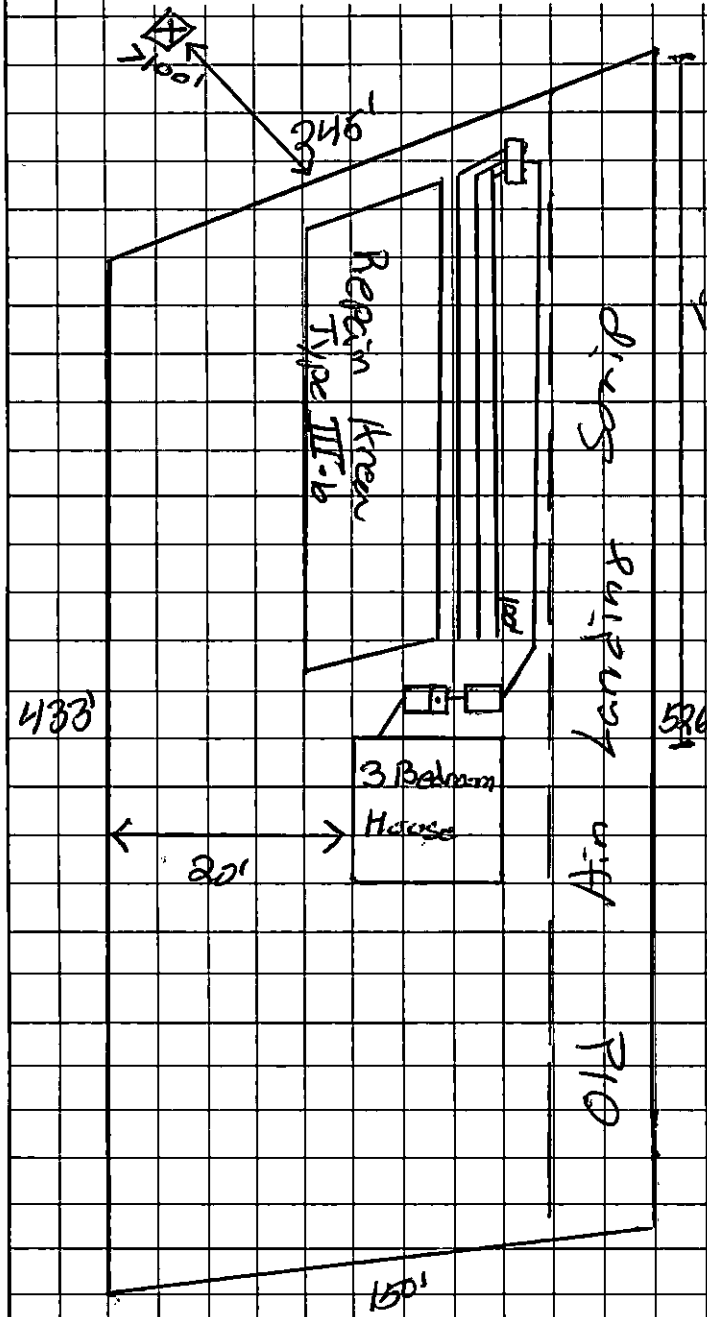

Comments:

1500 gallon Septic Tank
1000 Gallon Pump Tank
Type III-b 25% reduction
360 g/Day
LTAR .3 x/Day/Ft
repair = .25 g/Day/Ft²
Install pressure manifold
3 lines @ 100'

House is 180' from property Line 20' from side Line

Stay >10' from property line
>5' from House
No Basement
>100' from any well.

OWNER/AGENT SIGNATURE

DATE 11/20/02

APPROVAL DATE _____

White - Health Department's Copy Canary - E.H.S. Copy Pink - Owner's Copy

ck# 2515

FEE: $150 AUTHORIZATION FOR WASTEWATER SYSTEM CONSTRUCTION
DATE: 11/19/02 VOID SIXTY (60) MONTHS FROM DATE OF ISSUANCE

DATE: 11/19/02

PERMIT NO: 50443
PARCEL NO: 219-09-131

JOB LOCATION ADDRESS: 13515 Hamilton Rd
PROPERTY OWNER: Richard Creighton
BUILDING CONTRACTOR:
SUBDIVISION NAME:
AUTHORIZATION ISSUED BY: Brenda Sapp DATE: 11/19/02
DEHNR AUTHORIZED AGENT

AUTHORIZATION CONDITIONS

1. WASTEWATER SYSTEM CONSTRUCTION AND INSTALLATION MUST MEET ALL CONDITIONS AND SPECIFICATIONS AS SET FORTH IN IMPROVEMENT PERMIT NO. 50443, AND THE ATTACHED SITE PLAN WITH SYSTEM DETAILS. CONSTRUCTION AND INSTALLATION MUST ALSO MEET ALL REQUIREMENTS SET FORTH IN THE RULES GOVERNING SANITARY SEWAGE COLLECTION, TREATMENT, AND DISPOSAL AND ANY OTHER APPLICABLE RULES AND LAWS.

2. AN INSTALLATION, CONSTRUCTION, ALTERATION AND/OR REPAIR APPROVAL MUST BE SECURED PRIOR TO INSTALLATION OF THE SEPTIC TANK SYSTEM. THE INSTALLER OF THE SYSTEM SHALL BE A REGISTERED SEPTIC TANK CONTRACTOR WITH MECKLENBURG COUNTY HEALTH DEPARTMENT.

3. ANY ALTERATION IN SITE OR SOIL CONDITIONS (INCLUDING LOCATION OF STRUCTURES AND APPURTENANCES) OR MODIFICATION IN USE, DESIGN WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS AS SPECIFIED IN THE ASSOCIATED IMPROVEMENT PERMIT AND APPLICATION, MAY SUBJECT THIS AUTHORIZATION AND ASSOCIATED PERMIT(S) TO REVOCATION.

4. OTHER CONDITIONS: See IP and Proposed Plot Plan.

OWNER CERTIFICATION

I CERTIFY THAT THERE HAVE BEEN NO ALTERATIONS IN SITE OR SOIL CONDITIONS OR MODIFICATIONS TO FACILITY, WASTEWATER FLOW, OR WASTEWATER CHARACTERISTICS FROM THOSE SPECIFIED IN THE ORIGINAL APPLICATION OR ASSOCIATED IMPROVEMENT PERMIT UNLESS AUTHORIZED IN WRITING BY THE MECKLENBURG COUNTY HEALTH DEPARTMENT. I ALSO UNDERSTAND THAT ANY SUCH ALTERATIONS, MODIFICATIONS, OR FALSE INFORMATION ARE GROUNDS FOR REVOCATION OF PERMITS AND AUTHORIZATION TO CONSTRUCT.

X M S Sapp 11/20/02
SIGNATURE OF OWNER/OWNER'S REPRESENTATIVE DATE

p# 17965

INSTALLATION, CONSTRUCTION, ALTERATION, AND/OR REPAIR APPROVAL


HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 5044B DATE: 02/03/03

TC: 214-09-131 ☒ L

SERIAL 19214

Permission is hereby given to _____ (Install) or Construct, _____ Alter or Repair the individual septic tank wastewater treatment system with subsurface, soil absorption, effluent discharge as specified herein at the described location. This permit is granted based upon the information supplied in the application dated _____. All work shall be completed on or before _____, after which date this permit shall be null and void. The system shall meet all of the construction requirements of I5A NCAC 18A. 1900 which are in effect on the date of the granting of this permit. A Certificate of Completion or an Operation Permit must be obtained from the Mecklenburg County Health Department before any system can be covered up or placed into service. The issuance of this permit does not in any way guarantee that the system anticipated to be constructed will operate properly, or relieve any person now or hereafter owning, controlling or using such system from any liability resulting from the failure of the system to operate properly.

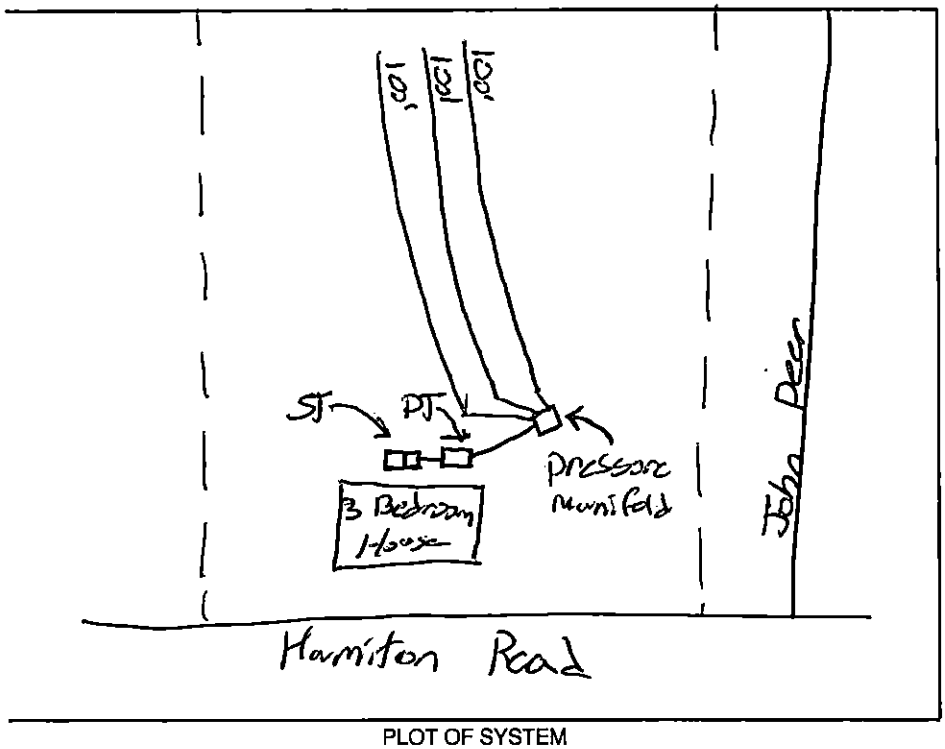

PLOT OF SYSTEM

Liquid Capacity of Septic Tank 1500 gallons

Liquid Capacity of Dosing Tank 1000 gallons

Tank Construction Pcc

Trench Depth 36"

Absorption and/or Nitrification Lines:

Trench Width 3' feet

Trench Walls Scored and Porous Yes

Total Line Length 300' feet

Number of Lines 3

Depth of Stone N/A inches

Distance from House >5' feet

Distance from Property Line >10' feet

Distance from Well >100' feet

NOTICE: This system shall not be installed while soils are in a wet condition.

NAME OF OWNER Richard Creighton

LOCATION OF PROPERTY 13515 Hamilton Road

Comments: Install Sch 80, Pressure manifold, 1500 septic Tank 1000 pump Tank.

Brad Sorey R.S.

Environmental Health Specialist

CONDITIONS OF ... 219-09-131

ermit Number: 50440

The IMPROVEMENT PERMIT is subject to revocation if site plans or the intended use change. There is to be NO grading, filling or disturbance of the soil in the area of the septic tank system or repair area.

CONSTRUCTION AUTHORIZATION must be obtained prior to receiving a Building Permit. The Construction Authorization is NOT transferable. Do not clear, grade, fill or disturb soil prior to obtaining a Construction Authorization.

Domestic-type wastewater only. No industrial process wastewater may be discharged into the system.

Basement	___ Yes	X No	___ Partial Basement	
Type Primary Wastewater System Type (circle one): I II (III) IV V VI	___ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	✓ Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1	
.3 Long-term acceptance rate	360 Max gallons/day wastewater flow	900 Absorption Area (sq ft)	9' Trench spacing (min. on centers)	
Yes Serviced by private well	1500 Gallon septic tank	300 Total trench length (ft)	30" Maximum trench depth (At least 12" of provisionally suitable soil must remain between trench bottom and unsuitable soil conditions)	
3 Bedrooms in residence	1000 Gallon pump tank	N/A Depth of stone		
Any surface waters present: No	Type:	Minimum separation distance:		
Site modifications required: No				
Additional Conditions: Stay >100' from well.				

Repair Area System Type Type (circle one): I II (III) IV V VI	___ Conventional ___ Prefabricated, permeable block panel system ___ Shallow Placed Conventional	___ Low Pressure Pipe ___ Large Diameter Pipe ___ Fill ___ Other	✓ Innovative or Experimental: ___ IWWS-93-1 ___ IWWS-93-2 ___ IWWS-94-1	
1080 Absorption Area (Sq ft) 360 Total Trench Length (Ft)	N/A Depth of Stone Trench	9' Trench spacing (min. on centers)	36" Maximum Trench Depth	
For existing system, enter the year originally installed:				

The undersigned, an authorized agent of the MECKLENBURG COUNTY HEALTH DEPARTMENT, certifies that the Department has approved the Request for Job Location contained in this document. This approval is granted in accordance with the provisions of Laws and Rules For Sewage, Treatment and Disposal in e at the time of issuance of the permit and is subject to the following provisions:

... No work shall be conducted on the septic tank system until an Installation, Construction, Alteration and/or Repair Approval is granted by this Departi

... This Improvement permit is transferable.

Brandon Sorg 11/19/02
DEHNR Authorized Agent Date

Owner/Agent Signature 11/20/02
Date

MECKLENBURG COUNTY
HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR.
SUITE 211
700 N. TRYON ST.
CHARLOTTE, N.C. 28202.
(704) 336-5102

NORTH CAROLINA DEPARTMENT OF
ENVIRONMENTAL, HEALTH,
AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

CERTIFICATE OF COMPLETION/OPERATION PERMIT

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 30443 DATE: 02/5/03

TC: 214-09-131 ☒ L ☒ CRT

SERIAL 19103

Name of Owner Richard Creighton Juris.:

Address of Property 13515 Hamilton Rd

☒ well is >220' away

Inspection Data:

Tank Material PCC

Total Length of Drainfield 300'

Number of Lines 3 @ 100'

Cover Depth 18"

Water Supply Source well


Distance to Water Source 100'+

Excavation Inspected 02/5/03

Tank(s) Inspected 02/23/03

Wash Line Inspected N/A

High Water Alarm Inspected 02/6/03

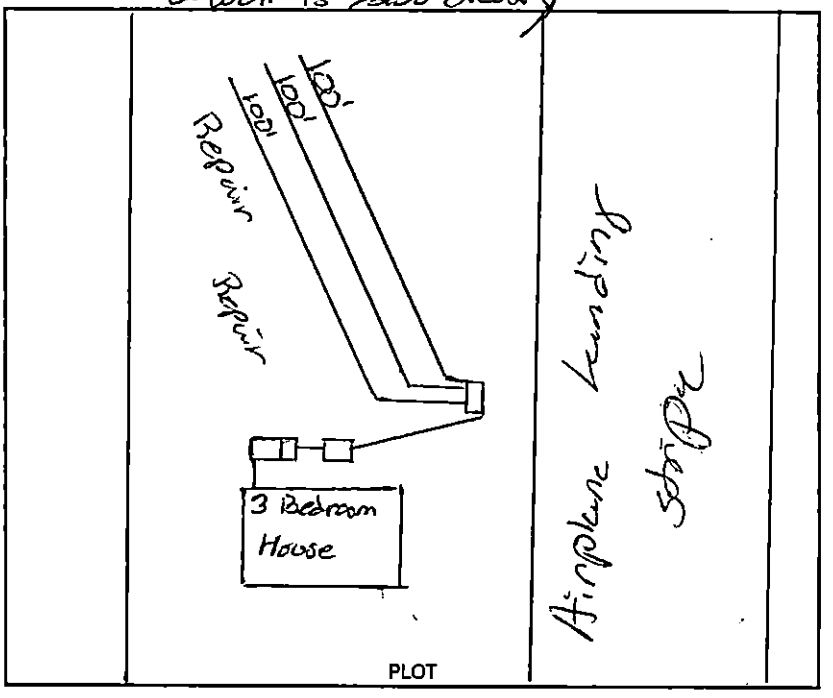

Design 2003, Type III-6, Chamber, 25% Reduction, Ceri/PI CTR# Bobby Mclaren

The undersigned has inspected the Septic Tank System described above, and certifies it has been

☐ installed or constructed ☐ altered or repaired

☒ in accordance with the permit issued ☐ as detailed in the plot above

and meets the provisions of I5A NCAC 18A. 1900, "Laws And Rules For Sewage Treatment and Disposal Systems" in effect on the date of issuance of the permit. This issuance of this

☐ Certificate of Completion ☒ Operation Permit

does not in any way guarantee that the system will operate properly or relieve any person now or hereafter owning, controlling, or using such system from any liability resulting from the failure of the system to operate properly. This document is issued subject to those restrictions and conditions shown on the permit(s) and the provisions of I5A NCAC 18A. 1990 in addition to those listed below under "COMMENTS." This document shall be null and void if any information contained in the application is untrue or if any additions are made to the property which would increase the requirements for said system.

Notice: Disturbance of the designated repair area may result in the suspension/revocation of this permit.

COMMENTS: 1500 gallon Septic Tank, 25% Reduction,

Environmental Health Specialist

Mecklenburg County services are available without regard to ethnic origin, sex, or disability.

FILE # 50443

COMMENTS 100% Repair, would need pump

LANDSCAPE POSITION	GROUP	TEXTURE	.1955 LTAR
R-RIDGE	I	S-SAND	1.2-0.8
S-SHOULDER SLOPE		LS-LOAMY SAND	
L-LINEAR SLOPE			
FS-FOOT SLOPE	II	SL-SANDY LOAM	0.8-0.6
N-NOSE SLOPE		L-LOAM	
H-HEAD SLOPE			
CC-CONCLAVE SLOPE	III	SI-SILT	0.6-0.3
CV-CONVEX SLOPE		SICL-SILTY CLAY LOAM	
T-TERRACE		CL-CLAY LOAM	
FP-FLOOD PLAIN		SCL-SANDY CLAY LOAM	
	IV	SC-SANDY CLAY	0.4-0.1
		SIC-SILTY CLAY	
		O-ORGANIC	

CONSISTENCE MOIST	WET
VFR-VERY FRIABLE	NS-NON-STICKY
FR-FRIABLE	SS-SLIGHTLYSTICKY
FI-FIRM	S-STICKY
VFI-VERY FIRM	VS-VERY STICKY
EFI-EXTREMELY FIRM	NP-NON-PLASTIC
	SP-SLIGHTLYSTICKY
	P-PLASTIC
	VP-VERY PLASTIC


STRUCTURE

SG-SINGLE GRAIN
M-MASSIVE
CR-CRUMB
GR-GRANULAR
SBK-SUBANGULAR BLOCKY
ABK-ANGULAR BLOCKY
PL-PLATY
PR-PRISMATIC

MINERALOGY

SLIGHTLY EXPANSIVE

EXPANSIVE

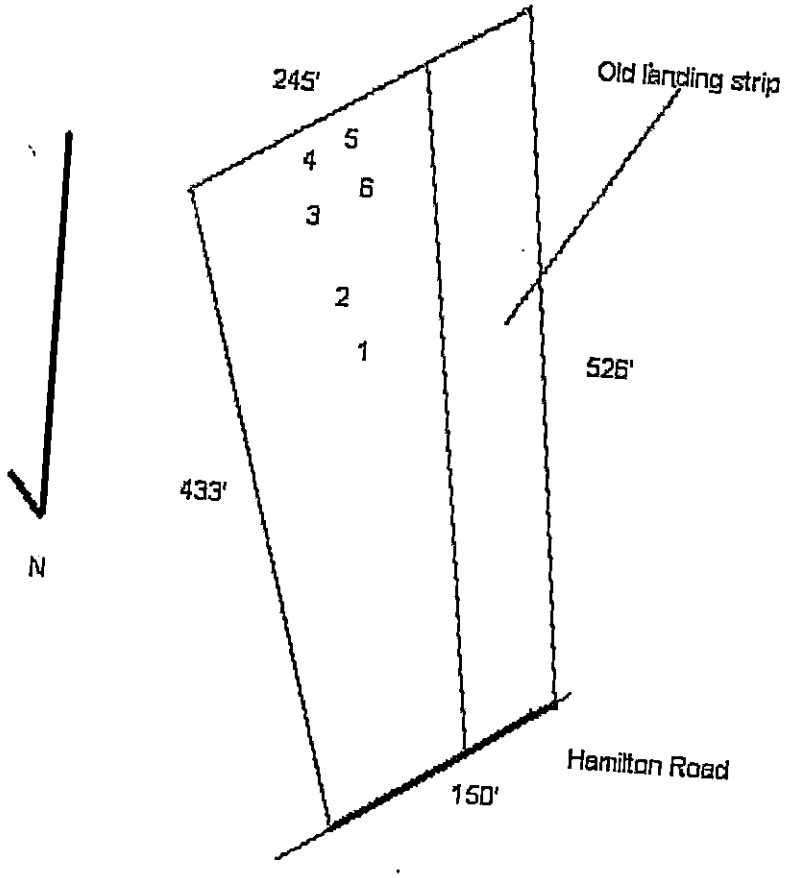

Department of Environment, Health, and Natural Resources
Division of Environmental Health
On-site Wastewater Section

Sheet: 1
Property ID: 219-091-31
Lot #: 2
File #: 5044B
Code: 1

AES

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

Owner: Richard Creighton
Applicant:
Address: 13523 Hamilton Road, Charlotte, N. C. 28278
Date Evaluated: 11/07/2002
Proposed Facility: Residence
Design Flow (.1949): 360gpd
Property Size: 1.0a
Location of Site: 13515 Hamilton Road
Property Recorded:
Water Supply: [ ] Public [x] Individual [x] Well [ ] Spring [ ] Other
Evaluation Method: [x] Auger Boring [ ] Pit [ ] Cut
Type of Wastewater: [x] Sewage [ ] Industrial Process [ ] Mixed

PROFILE #	.1940 Landscape Position/ Slope%	Horizon Depth (IN)	SOIL MORPHOLOGY .1941 .1941 Structure/ Texture	.1941 Consistence Mineralogy	OTHER PROFILE FACTORS .1942 Soil Wetness/ Color	.1943 Soil Depth (IN)	.1956 Sapro Class	.1944 Restr Horiz	Profile Class & LTAR
1		MIXED	FILL						US
2		"	"						"
3	LS, 8	0-8	GR/SCL	FR/SEXP/SS/SP	>48" TO SOIL WETNESS	48	N/A	NONE	PS, IV .3GPD/FT^2
		8-48	SBK/SC	FI/SEXP/S/P					
4	"	0-9	GR/SCL	FR/SEXP/SS/SP	"	"	"		PS, IV .275GPD/FT^2
		9-48	SBK/SC	FI/SEXP/S/P					
5	"	0-6	GR/SCL	FR/SEXP/SS/SP	"	"	"	"	PS, IV .3GPD/FT^2
		6-48	SBK/SC	FI/SEXP/S/P					
6	"	0-5	GR/SCL	FR/SEXP/SS/SP	"	"	"	"	"
		5-48	SBK/SC	FI/SEXP/S/P					

Description	Initial System	Repair System
Available Space (.1945)	PS	PS
System Type(s)		
Site LTAR	.3GPD/FT^2	.275GPD/FT^2

Other Factors (.1946): _____
Site Classification (.1948): PROVISIONALLY SUITABLE
Evaluated By: W. R. Marlin, LSS, 11/7/02, W. R. Marlin
Others Present:

CERTIFICATE OF COMPLETION/OPERATION PERMIT

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON ST., SUITE 211
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 30448 DATE: 02/5/03

TC: 214-09-131 ☒ L ☒ CRT

SERIAL 19103

Name of Owner Richard Creighton Juris.: _____

Address of Property 13515 Hamilton Rd

Inspection Data:

Tank Material PCC

Total Length of Drainfield 300'

Number of Lines 3 @ 100'

Cover Depth 18"

Water Supply Source well


Distance to Water Source 100'+

Excavation Inspected 02/5/03

Tank(s) Inspected 02/03/03

Wash Line Inspected N/A

High Water Alarm Inspected 02/5/03

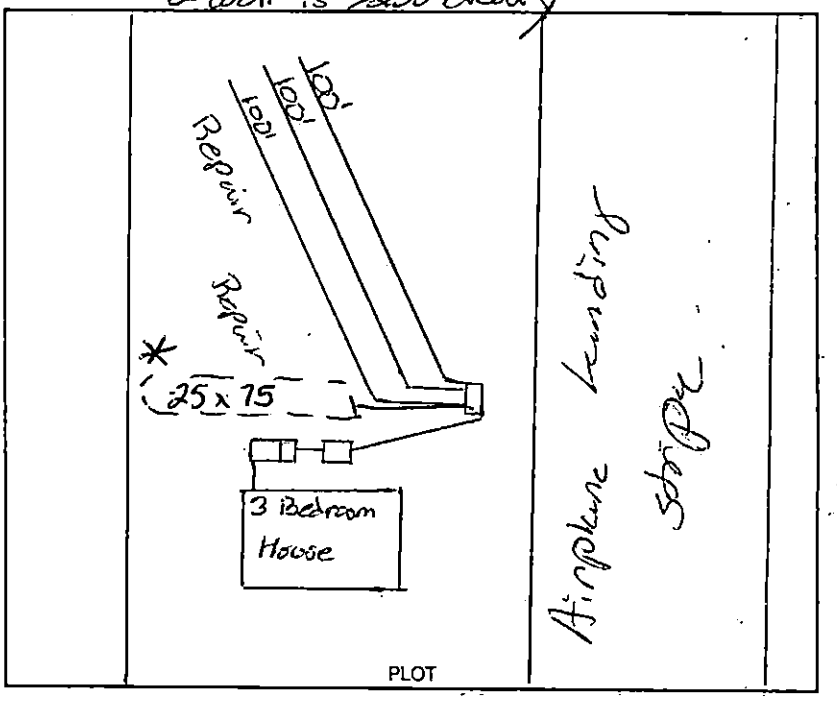

Design 2003, Type III-5, Chamber, 25% Reduction, Ceil/Pl CTR# Bobby / Maura

The undersigned has inspected the Septic Tank System described above, and certifies it has been

☐ installed or constructed ☐ altered or repaired

☒ In accordance with the permit issued ☐ as detailed in the plot above

and meets the provisions of 15A NCAC 18A. 1900, "Laws And Rules For Sewage Treatment and Disposal Systems" in effect on the date of issuance of the permit. This issuance of this

☐ Certificate of Completion ☒ Operation Permit

does not in any way guarantee that the system will operate properly or relieve any person now or hereafter owning, controlling, or using such system from any liability resulting from the failure of the system to operate properly. This document is issued subject to those restrictions and conditions shown on the permit(s) and the provisions of 15A NCAC 18A. 1990 in addition to those listed below under "COMMENTS." This document shall be null and void if any information contained in the application is untrue or if any additions are made to the property which would increase the requirements for said system.

Notice: Disturbance of the designated repair area may result in the suspension/revocation of this permit.

COMMENTS: 1500 gallon Septic Tank, 25% Reduction,

4/15/08 X REPAIR OF 25'x75' BED INSTALLED SOMETIME IN PAST W/O REPAIR PERMIT. TYPE MEDIA UNKNOWN. SYSTEM NOT MALFUNCTIONING AT TIME OF VISIT.

BS

Environmental Health Specialist

Mecklenburg County services are available without regard to ethnic origin, sex, or disabil[illegible]

4/15 – Control Panel OK. Needs duct sealant in outlet.
PT Lock broken. ~~On~~ off alarm working properly.
~~Duct~~ Conduit seal needed in high water outlet to control panel.
PM buried not accessible. Located drainfield. Working properly.
Identified 25' x 75' bed installed w/o repair permit.
Left contact info. Will discuss w/ KR.

PROJECT # 11765

FEE: 200
DATE: 10/28/02

APPLICATION FOR IMPROVEMENT PERMIT FOR RESIDENTIAL SITE INDIVIDUAL WATER AND WASTEWATER SYSTEMS PROGRAM

[ ] CRT

TYPE APPLICATION: X NEW SYSTEM __ EXPANSION/ ALTERATION OF EXISTING SYSTEM __ REPAIR OF EXISTING SYSTEM

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENT,
HEALTH, AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

FILE #: 5045

PROPERTY INFORMATION (FROM ENGINEERING FORM) FOR JOB LOCATION:

TAX/PARCEL NUMBER: 219-091-37

STREET ADDRESS: 13515 Hamilton Rd

SUBDIVISION OR MOBILE HOME PARK NAME:

LOT NUMBER: 2

TYPE OF BUILDING (CHECK ONE):

__ SINGLE MOBILE HOME(S)
__ DOUBLE WIDE (D)
__ HOUSE (H)
X MODULAR HOME (M)
__ MULTIPLE FAMILY (U)
__ OTHER (O)

HEATED SQUARE FOOTAGE: 1848

NUMBER OF BEDROOMS: 3

NUMBER OF OCCUPANTS: 3

FOUNDATION FOR RESIDENCE:

__ WITHOUT BASEMENT ON SLAB
X CRAWL SPACE
__ WITH BASEMENT /PLUMBING
__ WITH BASEMENT /NO PLUMBING

TOWNSHIP (CHECK ONE):

X 0 MECKLENBURG
__ 1 CHARLOTTE
__ 2 DAVIDSON
__ 3 CORNELIUS
__ 4 PINEVILLE
__ 5 MATTHEWS
__ 6 HUNTERSVILLE
__ 7 MINT HILL

CLOSING DATE 7-31-02

IF EXPANSION/ALTERATION OF EXISTING SYSTEM, DESCRIBE THE PROPOSED BUILDING ADDITION:

WILL THERE BE A HOME BUSINESS IN THE RESIDENCE: __ YES X NO TYPE: _____

WATER SUPPLY (CHECK ONE):

__ COMMUNITY (C)
__ MUNICIPAL (M)
X PRIVATE WELL (P)
__ SHARED WELL (S)
__ OTHER 'SPRINGS' (O)

IF ANY OF THE FOLLOWING ARE LOCATED ON THE PROPERTY, PLEASE SHOW LOCATION ON PLAT:

BURIED CABLES, LANDFILLS, STUMPHOLES X YES __ NO
EXISTING WASTEWATER SYSTEMS __ YES __ NO
EASTMENTS OR RIGHT-OF-WAYS __ YES __ NO
WELL, SPRINGS OR WATERLINES __ YES __ NO
DESIGNATED WETLANDS __ YES __ NO

PROPERTY OWNER:

NAME: (LAST) @CAEighton (FIRST) Richard (MI)

ADDRESS: 13523 Hamilton Rd

CITY: Charlotte STATE: NC. ZIP: 28278

DAYTIME PHONE: 704 201 - 6390

LEGAL AGENT FOR PROPERTY OWNER, IF APPLICABLE:

NAME: (LAST) (FIRST) (MI)

DAYTIME PHONE: ( ) -

WHAT DATE WAS THE PROPERTY ORIGINALLY DEEDED AND RECORDED? Back in the 60's

An Improvement Permit is subject to suspension or revocation if site plans or the intended use change or if information submitted in this application is falsified or changed. The undersigned, owner, or legal agent for the owner, of the property described above as the "Job Location" has read the foregoing application, acknowledges that the contents of same are true, and authorizes agents of the Mecklenburg County Health Department to enter onto the property for the purpose of processing this request.

SIGNED: M. S Sandmeyer DATE: 10/28/02

MECKLENBURG COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
c/o HAL MARSHALL CTR., SUITE 211, 700 N. TRYON ST., CHARLOTTE, N.C. 28202., (704) 336-5102

PROPOSED PLOT PLAN


Project # 17965

HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH DIVISION
700 NORTH TRYON STREET
CHARLOTTE, NC 28202
PHONE (704) 336-5102

FILE: 5044B

TC: 21-09137

Draw in and name all roads adjoining the property. Draw in and accurately dimension the lot concerned. Accurately indicate property boundaries proposed and/or existing structures and driveways, underground utilities, and wells and springs within 100 feet of the proposed building or drainfield.

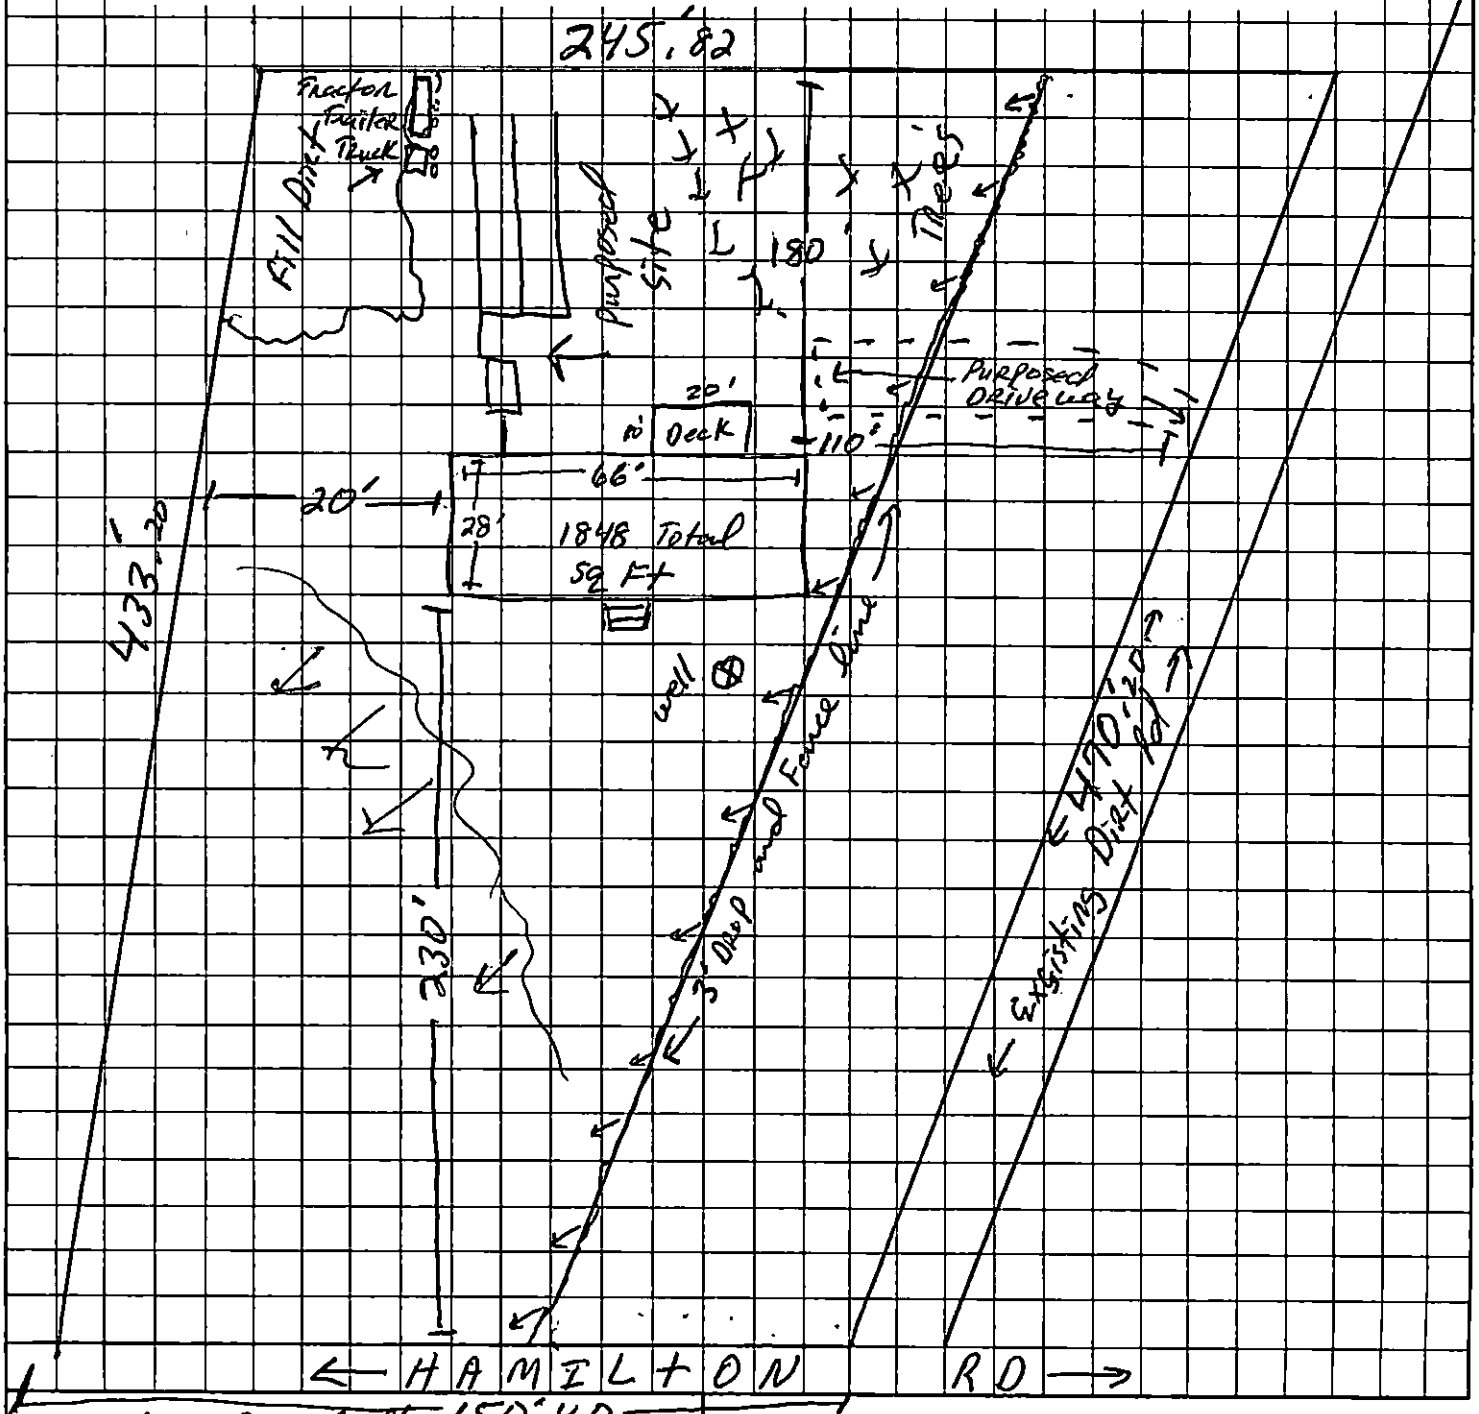

Michael J Faulkner
OWNER/AGENT SIGNATURE

DATE 10/28/02

APPROVAL DATE _____

White - Health Department's Copy

Canary - E.H.S. Copy

Pink - Owner's Copy