Date Issued 10-1-73

Serial No. 4513

ICAR (S) Permit No. 7512

T. C. No. 73-043-25

Map Date 9-5-73


MECKLENBURG COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

INSTALLATION, CONSTRUCTION, ALTERATION, AND OR REPAIR PERMIT

(Individual Septic Tank System with Subsurface, Soil Absorption, Effluent Discharge)

Permission is hereby given to ✓ Install or Construct, After or Repair the individual septic tank wastewater treatment system with subsurface, soil absorption, effluent discharge as specified herein at the described location. This permit is granted based upon the information supplied in application _____, dated _____ and this permit shall be void and of no effect if the information provided in the application is not true or is erroneous. All work shall be completed on or before 11-1-73, after which date this permit shall be null and void.

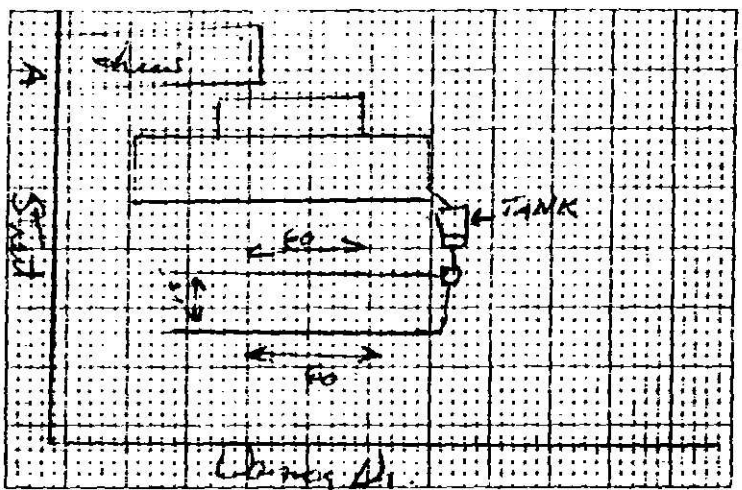

PLOT OF SYSTEM

Percolation Rate 60

Liquid Capacity of Tank 1100 gal

Tank Construction pre cast con

Absorption and/or Nitrification Lines

Total Line Lenght 120*

Number of Lines 2

Distance from House 10'

Distance from Property Line 5'

Distance from Well NA

NAME OF OWNER A F Dorsey Co

LOCATION OF PROPERTY Dorsey Drive - I-A

The system shall meet all of the construction requirements as set forth in the Regulations of the Mecklenburg County Board of Health which are in effect on the date of the granting of this permit. A certificate of approval must be issued by the Health Director before any system can be covered up or otherwise rendered uninspectable or can be used.

Comments: 2 block lines 60' long

* Experimental Case System - Combination 300' Total ft. of Line

Division or Section Head

Environmentalist Thomas R. Wood

* If this permit is for the installation or construction of a new system, it must be signed by the division or a section head of the Environmental Health Division in order to be valid. Only the signature of the Environmentalist is required where an existing system is being altered or repaired.

FORM NO E 5-4-1-71

HEALTH DEPARTMENT'S COPY